


NA5PLUS - DIGITAL METER WITH BARGRAPH

- 3 or 7-colour bargraph with programmable colour switching over.
- Logging of the measured signal in programmed time intervals (800 samples).
- Universal measuring input.
- Programmable indication characteristic (21-point rescaling) and bargraph magnifier.
- Up to 8 programmable alarm outputs.
- Alarm triggered by the rate of change of the measured signal over time.
- Arithmetical functions x^2 , \sqrt{x} .
- Communication in SCADA systems (RS485/Modbus interfaces).
- Conversion of any measured value into a current or voltage analog signal.

EXAMPLE OF APPLICATION

Measurement of pressure in a pipeline.

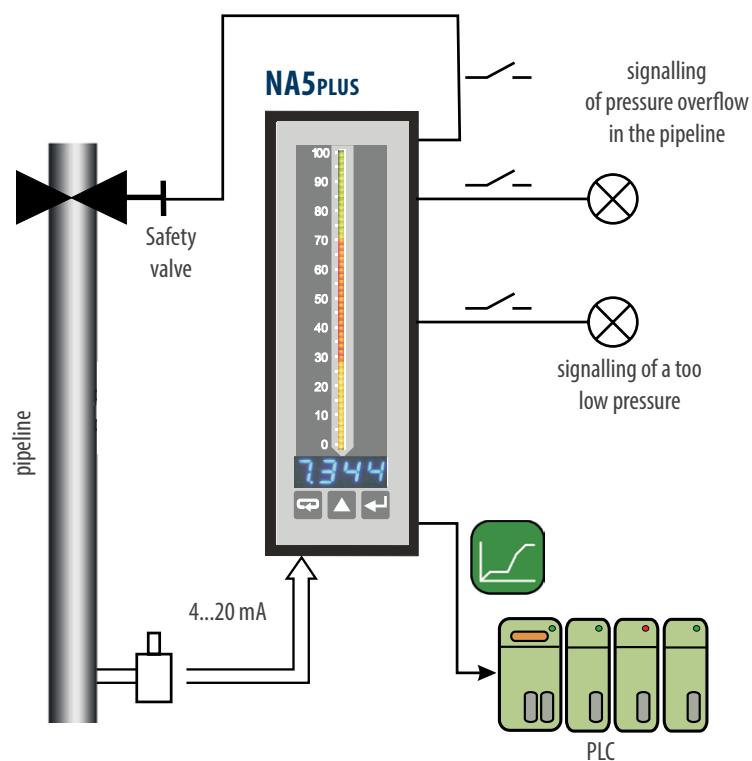

FEATURES	INPUTS	OUTPUTS	GALVANIC ISOLATION
MODBUS RTC 21 points charact. Password protection IP50 eCon	DC 0 .. 20 mA U 60 mV Ω 0.10 V	0 .. 20 mA 0..10 V ΦU Σ- RS 485 ΣK	RS 485 Supply

TECHNICAL DATA

INPUTS				OUTPUTS	
Input type	Measurement range	Basic error	Additional error	Output type	Features
Pt100	-200...850°C			Current analog output	1 or 2 programmable 0/4...20 mA; load resistance $\leq 500 \Omega$
Pt500	-200...850°C			Voltage analog output	1 or 2 programmable 0-10 V; load resistance $\geq 500 \Omega$
Pt1000	-200...850°C			Relay output	4 relays; NOC voltageless contacts, maximal load: - voltage: 250 V a.c., 150 V d.c. - current: 5 A 30 V d.c., 250 V a.c.
J (Fe-CuNi)	-100...1100°C	0.1%	compensation of temperature changes of reference welds $\leq \pm 1^\circ\text{C}$	Open collector (OC) type	8 outputs of OC type: maximal load: - voltage: 5...30V d.c. - current: 25mA d.c.
K (NiCr-NiAl)	-100...1370°C		compensation of cable resistance changes - when changing the resistance of wires $< 10\Omega$ the error is $\leq \pm 0.5^\circ\text{C}$	Digital interface	interface type: RS-485; transmission protocol: MODBUS, RTU (8N2, 8E1, 801, 8N1) baud rate: 2400, 4800, 9600, 19200, 57600, 115200 b/s
N (NiCrSi-NiSi)	-100...1300°C		- when changing the resistance of wires $< 20\Omega$ the error is $\leq \pm 1^\circ\text{C}$		
E (NiCr-CuNi)	-100...850°C			Additional supply output	24 V d.c., maximal load 30 mA
R (PtRh13-Pt)	0...1760°C				
S (PtRh10-Pt)	0...1760°C	0.2%			
T (Cu-CuNi)	-50...400°C				
Resistance	0...10 kΩ				
Voltage	$\pm 75 \text{ mV}, R_{\text{inp}} > 100 \text{ k}\Omega$ $\pm 300 \text{ mV}, R_{\text{inp}} > 100 \text{ k}\Omega$ $\pm 0...600 \text{ V}, R_{\text{inp}} > 3.5 \text{ M}\Omega$	0.1%	change in ambient temperature $\leq \pm 0.1\%$ of the range		
Current	$\pm 40 \text{ mA}, R_{\text{inp}} < 4 \Omega$ $\pm 5 \text{ A}, R_{\text{inp}} = 10 \text{ m}\Omega \pm 10\%$				

Intensity of current flowing through the resistance thermometer: < 400 μA

Resistance of wires connecting the resistance thermometer with the meter: < 20 Ω/1 wire

EXTERNAL FEATURE


Readout field	4-digits LED dispaly bargraph	7-segment digits of 7 mm high, measuring range -1999...9999 bargraph of 100 mm lenght: - 55 segments in three-colour version - 28 segments in seven-colour version Bargraph resolution: programmable
Overall dimensions	48 x 144 x 100 mm	
Weight	< 0.4 kg	panel cut-out: 44+0.5 x 137.5+0.5 mm
Protection grade (acc. to EN 60529)	from frontal side: IP50	from terminal side: IP20

RATED OPERATING CONDITIONS

Supply voltage	95...253 V a.c. 40...400 Hz; 90...300 V d.c. 20...40 V a.c. 40...400 Hz, 20...60 V d.c.	power consumption $\leq 13 \text{ VA}$
Temperature	ambient: -10...23...55°C	storage: -25...85°C
Relative humidity	< 95%	Condensation inadmissible



SAFETY AND COMPATIBILITY REQUIREMENTS		
Electromagnetic compatibility	noise immunity	acc. to EN 61000-6-2
	noise emissions	acc. to EN 61000-6-4
Pollution grade	2	
Installation category	III	acc. to EN 61010-1
Maximal phase-to-earth operating voltage	<ul style="list-style-type: none"> for input circuit: 600 V for supply circuit: 300 V for other circuits: 50 V 	
Altitude above sea level	< 2000 m	

ELECTRICAL CONNECTIONS

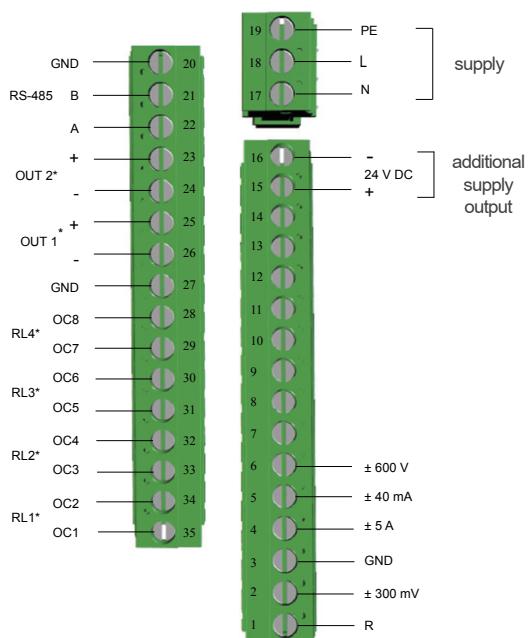


*-optional elements depend on the meter's version

Fig. 1 Description of the terminal strip.

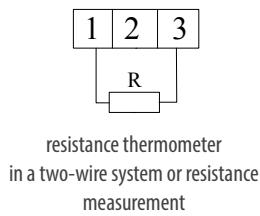


resistance thermometer
in a two-wire system or resistance
measurement



voltage input ± 10 V, ±600 mV


± 600 V




current input ± 40 mA




current input ± 5 A




8 open collector outputs (OC)

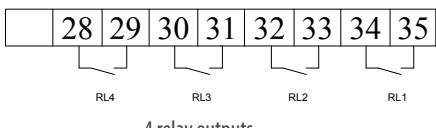


4 relay outputs




analog outputs
(voltage/current)



interface RS-485 (Modbus)



two-wire object transducer



three-wire object
transducer

Fig.3. Connection way of output signals
depending on the execution code.

Fig. 2 Connection way of input signals.

ORDERING

NA5PLUS -	X	X	X	X	X	X	X	XX	X	X
Bargraph colour:										
3-colour (R, G, R+G)	T									
7-colour(R, G, B, R+G, R+B, G+B, R+G+B)	M									
Display colour:										
red	R									
green	G									
custom-made*	X									
Input signal:										
universal input	U									
custom-made*	X									
Analog output:										
lack	0									
0/4...20mA	1									
0...10 V	2									
2 x 0/4...20 mA	3									
2 x 0...10 V	4									
1 x 0/4...20 mA, 1 x 0...10 V	5									
Additional output:										
lack	0									
4 relays	4									
8 outputs of OC type	8									
Supply voltage:										
95...253 V a.c./d.c.	2									
20...40 V a.c., 20...60 V d.c.	4									
Kind of terminals:										
screwed plug-in sockets	0									
Version:										
standard	00									
custom-made*	XX									
Language:										
Polish	P									
English	E									
other*	X									
Acceptance tests:										
without extra requirements	0									
with an extra quality inspection certificate	1									
acc. to customer's request	X									

* - after agreeing with the manufacturer

Odering example:

The code **NA5PLUS- TGU18200E0** means:

NA5PLUS - NA5PLUS meter
T - bargraph RG
G - green display colour
U - universal inputs
1 - current output 0/4...20 mA
8 - 8 outputs of OC type
2 - supply 95...253V a.c./ 90...300V d.c.
00 - standard version
E - english version
0 - without extra requirements

For more information about Lumel products
please visit our website:

www.lumel.com.pl 

Join us at Facebook!



NA5Plus19_en