


Special-Sensors for Automation

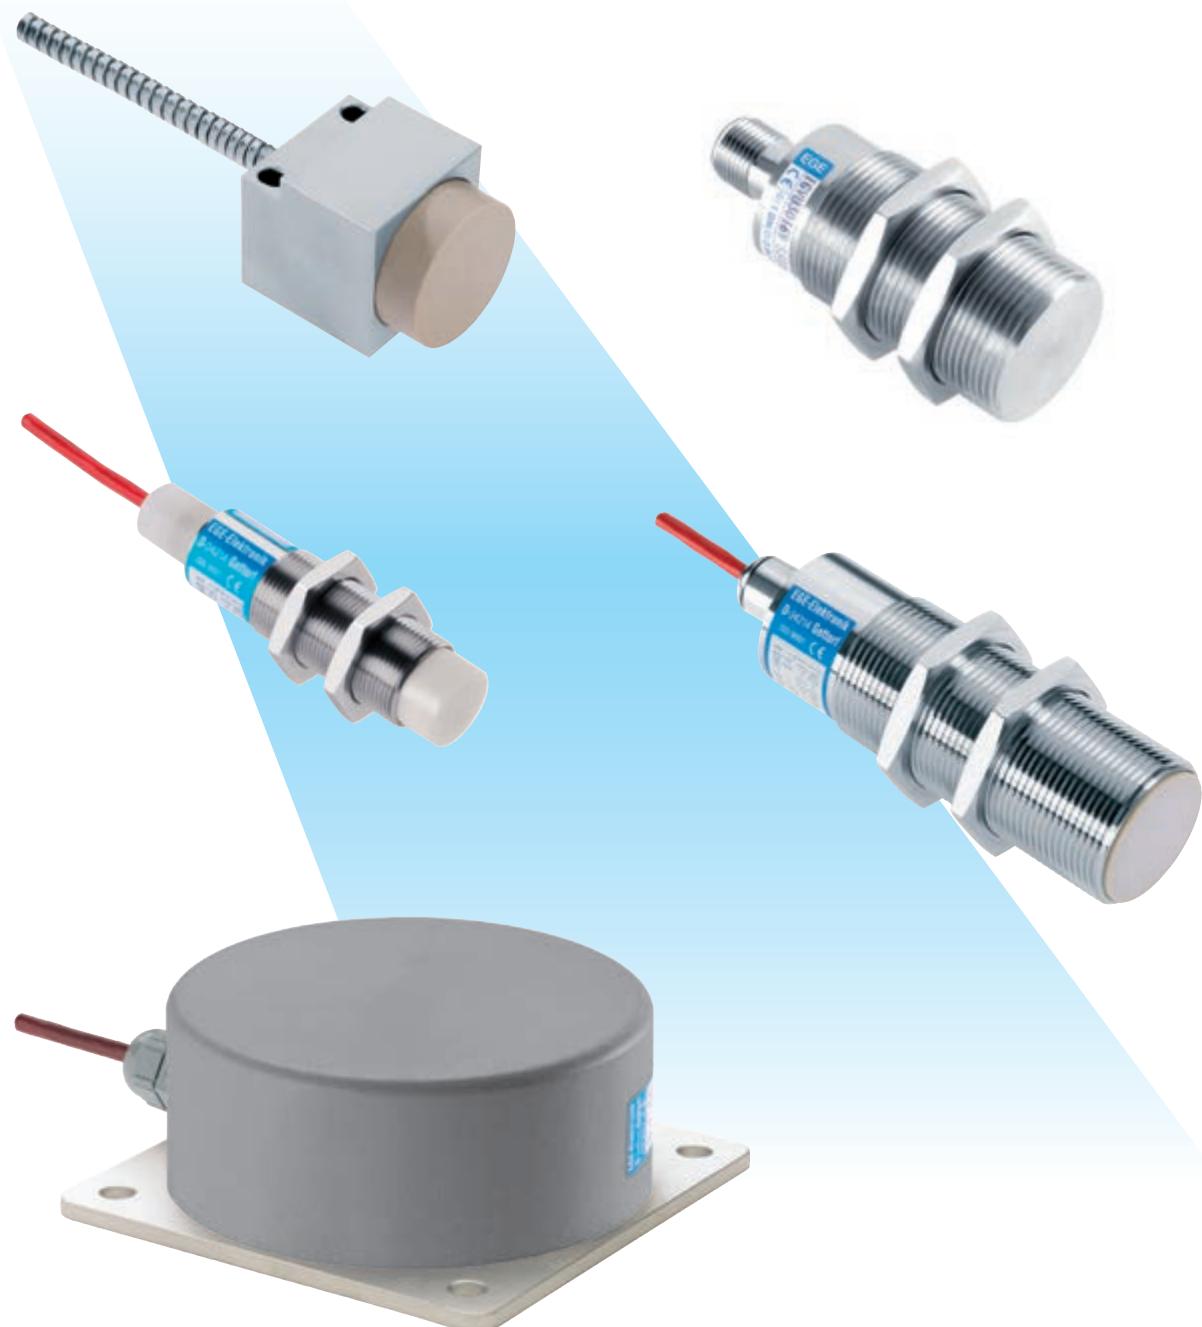

Inductive Sensors

Contents

Terminology for inductive measurement	3.03 - 3.05
Application notes	3.06
Extreme environment	
Metal face sensors Series IGV / IGVU...-C / IGVW.....	3.07 - 3.10
Mounting clamp for metal face sensors Series KBM	3.11
POLAR-Series climatic-proofed -60 °C Series IGMP / -80 °C Series IGMP	3.12 - 3.14
TROPICAL-Series climatic proofed 120 °C Series IGMF / IGMW	3.15 - 3.20
TROPICAL-Series resistant to cooling fluids 120 °C Series IGFW / INFW	3.21 - 3.22
TROPICAL-Series resistant to cooling fluids armoured cable Series IGMF / INFW	3.23 - 3.24
High temperature 120 °C Series IGMT / Series IDT	3.25 - 3.27
High temperature 160 °C Series IGMH	3.28 - 3.29
High temperature 250 °C Series IGH / IRH / IDH	3.30 - 3.31
High temperature 200 °C Series INT	3.32
Amplifiers for high temperature sensors Series IKM / IU	3.33 - 3.34
Demanding environment	
Metal sleeve M12 / M18 / M30 Series IGM	3.35 - 3.38
Long sensing range Ø 80 mm / Ø 105 mm / Ø 160 mm / Ø 200 mm Series ID	3.39 - 3.42
Analog sensors	
Metal sleeve M12 / M18 / Series IGA.....	3.43 - 3.44
Long sensing range Ø 80 mm Series IDA	3.44
High temperature 160 °C Series IGT	3.45
Standard switches	
Metal sleeve M12 / M18 / M30 Series IGM	3.46 - 3.47
Smooth-bodied switches Ø 20 mm / Ø 34 mm Series INK	3.48
Special functions	
Surface sensors Series IFE.....	3.49 - 3.50
Offshore Series IGMO / Series IGVO	3.51 - 3.52
Washing resistant Series IDKW.....	3.53
Factor 1 Series IGB / IDB	3.54
Speed sensor Series HGVH	3.55
Ex-Series	
Dust / Gas-Ex compact model Zone 0/20 Series IGEX20a	3.58
Dust / Gas-Ex compact model Zone 0/20 Series IGEX20Pa.....	3.59
Dust / Gas-Ex intrinsically safe Zone 0/20 Series IGEXUa / IGEXa	3.60 - 3.61
Dust / Gas-Ex intrinsically safe Zone 0/20 Series IGEXHa	3.62
Dust / Gas-Ex intrinsically safe Zone 0/20 Series IGEXPa	3.63
Dust / Gas-Ex compact model 2/22 Series IGEX22c.....	3.64
Dust / Gas-Ex compact model 2/22 Series IGVEX22c	3.65 - 3.66
Ex-Amplifiers Series IKMb 122 Ex / IKMb 123 Ex	3.67 - 3.68
Accessories	
M12 connector	3.69
PG plug system	3.70
Assembly parts	3.71

Technical alterations are reserved to us without prior announcement. The information provided in this catalogue is for reference only. Product installation information can be found in the instructions supplied with each product.

Terminology for inductive measurement

Operating Principal

An inductive proximity switch works with a high frequency oscillating circuit that creates an alternating electromagnetic field on the active sensor surface by means of a coil. When a metallic object nears this field a damping occurs in the oscillating circuit. If this damping exceeds a threshold value, a switching signal is generated.

Operating distance

The operating distance is the distance between an object and the active sensor surface at which a switching signal is generated. The operating distance depends on the diameter of the coil. Therefore larger sensors are required for longer operating distances. On some of the EGE sensors the operating distance is adjustable.

If a metal object dampens only a part of the alternating field, the operating distance decreases; a larger object increases it. The following approximate values are derived from a standard rectangular measurement plate made of steel ST 37 with an edge length that corresponds to the diameter of the sensor coil or three times the rated operating distance, whichever is greater.

Damping area in %					
150	100	75	50	25	12.5
Operating distance in %					
110	100	93	86	73	55

The operating distance is influenced by the material of the object: Constant dimensions for different materials against steel ST 37 yield a changed operating distance.

The following table lists approximate values for the material dependent reduction factors. In practical applications variations could occur due to different alloying, for example.

Material	Operating distance in %
steel ST37	100
stainless steel	70
brass (Br)	50
copper (Cu)	45
aluminium (Al)	40

Rated operating distance s_n

The rated operating distance is a device parameter that does not take into account sample variances and external influences such as temperature and supply voltages.

Effective operating distance s_r

The effective operating distance is the operating distance at nominal voltage and a nominal temperature of 23 °C. It is between 90% and 110% of the rated operating distance.

Usable operating distance s_u

The usable operating distance lies in the entire allowable temperature and voltage range between 90% and 110% of the effective operating distance.

Assured operating distance s_a

The assured operating distance takes into account all the external influences and sample variances and lies in the range from 0% to 80% of the usable operating distance. Within this range a guaranteed switching is ensured.

Switch point drift

The operating distances are given for an ambient temperature of 23 °C. In the permissible temperature range the operating distance varies by less than 15% from the value at 23 °C. The temperature of the measured object has no influence on the switch point.

Hysteresis H

The switching hysteresis describes the distance between the turn-on point while approaching an object and the turn-off point during the separation of it from the sensor. The hysteresis brings about a stable switching signal even when there are vibrations, temperature drift, or electrical variations. The hysteresis is defined in EN 60947-5-2 as a maximum 20% from the effective operating distance, and carries a value of typically 10% from the effective operating distance s_r for EGE sensors.

Repeating accuracy R

The repeating accuracy describes the maintenance of the switching point after the repeated approach of an object under specified circumstances. EGE sensors have typical tolerances of less than 3% of the effective operating distance.

Switching frequency

The maximum switching frequency of the sensor is determined at half rated operating distance s_n with standard measurement plates to EN 60947-5-2

Terminology for inductive measurement

Operating voltage

The operating voltage is the voltage range within EGE sensors function safely. For a constant voltage supply it is important to make sure that the limits are still observed when the residual ripple is included.

Switching current

This current gives the maximum long-term current for the switching output of the sensor at an ambient temperature of 25 °C and ohmic load. At an elevated ambient temperature, the current load capability decreases.

For analog outputs, the boundary values given in the appropriate technical data, and particularly the permissible values for resistance loads, must be observed.

Short circuit protection

The short circuit protection ensures the sensor against destruction through a short circuit on the output. After removal of the fault, the output is reactivated. Where a maximum overload current is listed, this should not be exceeded.

Excess-current release

This value indicates the median value of current at which the short circuit protection responds with a tolerance of $\pm 20\%$.

Reverse polarity protection

The reverse polarity protection prevents destruction of the sensor by a reversal of the polarity of the voltage supply.

Voltage drop U_d

The voltage drop arises at the internal resistance of semiconductor elements, which are in the current-path of the output. It is dependent of the load-current and is declared according to EN 60947-5-2 for a mean current of 50 mA.

Residual current I_r

The residual current flows in the load current circuit when the output is blocked. The residual current must be considered when switching sensors in parallel.

Minimum load current I_m

The minimum load current is necessary for flawless operation with two-wire devices.

Current consumption

The current consumption is the maximum value of the no-load current I_0 that the sensor can absorb without a load.

Ambient temperature

The ambient temperature indicates the maximum allowable temperature range for the sensor.

Electromagnetic compatibility EMC

The EMC class is a measure of the noise immunity of the sensor against external electrical and magnetic influences. The information is based on the standard EN 61000-6-2.

Switch-on impulse suppression

EGE sensors have a switch-on suppression that blocks the output during the switch-on phase, when the operational voltage is applied.

Protective system

The protective system indicates the protection of the sensors against penetration of foreign bodies and water to EN 60529.

LED display

EGE sensors with yellow light-emitting diodes indicate the switching status optically.

Housing material

The housing material determines the chemical resistance of the sensor against external influences. For special applications, other housing materials are available.


Connection

The connection of the sensors is accomplished through plug-in connections or cables. Different cable types and lengths are available upon request.

Instructions for mounting

Mounting

For flush mounting the sensor can be built into metal up to its active surface without changing its characteristics. For non-flush mounting a metal-free zone around the sensor must be allowed for. A free zone to the material opposite the sensor must be maintained for all sensors.

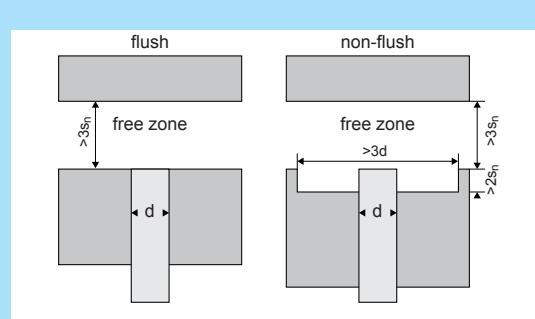

The indicated free zones are in accordance with the standard EN 60947-5-2.

Fixing nuts are part of delivery for all metal thread sensors. For mounting clamps see page 3.71.

Terminology for inductive measurement

Collocation

When collocating the sensors, a minimum separation must be kept between the devices. When in doubt, a test should be conducted under application conditions. For flush mounting the lateral separation between two sensors must correspond to at least the diameter of the sensor. For non flush mounting, the lateral separation from each other must correspond to at least twice the diameter of the sensor. For oppositely mounted sensors, a minimal separation of six times the rated operating distance should be allowed.

Torques

In order to prevent destruction of the threaded bushing during fitting, the following maximum torques must not be exceeded:

Design	Metal Housing	Plastic Housing
M12x1	10 Nm	1 Nm
M18x1	25 Nm	2 Nm
M30x1.5	40 Nm	5 Nm

PTFE sensors may only be tightened by hand.

Instructions for operation

Serial connection

For the serial connection of two wire or three wire sensors the individual voltage drops are added together. Therefore there is a lesser operational voltage at the disposal of the load. The addition of the switch-on delay times should be noted.

Parallel connection

The parallel connection of two wire sensors can only be conditionally recommended since the residual currents are added together and flow through the load. For the parallel connection of three wire sensors, the current consumption of the individual devices is added together. Since this current does not flow through the load, the maximum number of parallel connectable three wire sensors depends only on the power supply.

Approval for safety applications

Sensors for personal security must have a qualification approval according to EN 61508 and must be labeled accordingly. Sensors that are not labeled must not be used for applications of this kind.

Application notes

Metal face sensors

page 3.07 - 3.10

The inductive proximity switches series IGV are used in areas with heavy-duty mechanical loads at the sensor's face or where seals between face and housing cannot be used. Chips hitting the front or frequently changing coolants or lubricants do not diminish the function of these proximity switches. The variants with a PTFE coating are particularly well-suited for welding lines and similar environments where sensors are exposed to heavy soiling.

Metal face switches are manufactured from stainless steel and are one solid piece. They detect iron and steel through the metal front face.

POLAR-Switches

page 3.12 - 3.14

The POLAR-switch is ideal for application in cold storage houses and in extreme climate conditions. It is waterproof, safe for cleaning and extremely chemical-resistant. Because of its stainless steel housing, it can withstand vibrations on vehicles. The POLAR-switch is very compact and robust, it can be used from -60°C to $+60^{\circ}\text{C}$. IGMP 030 S-80 sensors are suitable in cryogenic processes and for medical-technical applications; they can be used for temperatures up to -80°C .

TROPICAL-Switches

page 3.15 - 3.20

The TROPICAL switches series IGMF are anticipated for applications in corrosive environment. They are stable particularly at frequent temperature changes and simultaneously high humidity. The permanent work in carwashes is permissible. The high corrosion resisting at simultaneously high mechanical loading capacity is reached through the combination of PTFE and titan stabilized stainless steel. The PTFE-hoods are sealed through fluoroelastomers O-rings surely. The FEP-connecting cable is poured within the housing and freed over a double seal from the housing. Cable lengths up to 100 m are available. The installed LED's are shining through the cable side cap and don't break out the case. IGMW series sensors are suitable for hydro steam environments with pressures of up to 4 bars. For higher pressures in hydro steam environments, IGVW series sensors made of full stainless steel are recommended.

120 °C-High temperature switches

page 3.21 - 3.27

The inductive PTFE switches series IGFW and INFW are made entirely of PTFE. The housing cover is securely sealed with a fluoroelastomer O-Ring. These sensors are designed for particularly difficult and aggressive environmental conditions. They can be used in damp and aggressive environments as well as under water (oil).

IGMT- and IDT-series proximity switches are designed for use in temperatures up to 120°C .

160 °C-High temperature switches

page 3.28 - 3.29

Inductive compact devices for ambient temperatures up to 160°C are available flush and non-flush in the standard designs M12, M18 and M30 with switching distances from 2 mm to 15 mm. The material used is the rugged stainless steel housing combined with high temperature resistant PEEK plastic.

250 °C-High temperatures sensors

page 3.30 - 3.31

The inductive proximity switches series IGH/IDH/IRH are used for ambient temperatures up to 250°C . The units feature optional a plug connection which withstands high temperatures, allowing users to quickly and easily install a replacement sensor head in case of damage without having to replace the sensor cable. The sensors are particularly suited for operation in extreme heat, e. g. in drying ovens or brick kilns. Manufactured from aluminum / stainless steel and PEEK, the robust sensors can be used in rugged industrial environments. Their electronics are housed separately in a pluggable cable amplifier. The units are connected via a metal armored cable.

Amplifiers

page 3.33 - 3.34

Switching amplifiers are designed for induction sensors for which it is necessary to separate the sensor coil from the amplifier, e. g. for operating temperatures above 160°C or for sensor coils which must be exchanged due to frequent damage.

The switching amplifiers work statically, that is, if the sensor coil is permanently damped, the switching output also remains activated. Switching interval and hysteresis (IKM 120 GPP, IU 130...) can be set on the amplifier. The sensor cable may have a length of up to 20 m.

Demanding environment

Seite 3.35 - 3.42

The "Demanding environment" series is especially designed for harsh environments in which sensors are subjected to high electrical, electromagnetic or mechanical stress. For sensors used in critical applications, EGE has developed special inspection and test methods which place particular emphasis on the disturbances that occur in various production environments. The sensors are designed to be very resistant to the interference spectra produced by, e. g., frequency inverters, wireless communication systems and switching power supplies.

Surface sensors IFE...

page 3.49 - 3.50

The switches are build as flat sensors. They are used particularly to detect moving sheet metal or steel rods on conveyor belts. The complete sensor is covered, which make the sensor moisture resistant.

Reduced overall height affects the operating distance (sn). The IFE switches are self-contained with integral amplifier.

Dust- and Gas-Ex sensors

page 3.58 - 3.68

IGEX and IGVEX are sensors for detecting metals in the Ex area zone 0/20 and zone 2/22 according to ATEX and IECEx. Devices can be delivered in the standard configurations M12, M18 and M30. For extreme environment sensors are available for high and low temperatures (up to $+140^{\circ}\text{C}$ and down to -60°C respectively), both in IP 68 / 69K.

Metal face sensors • Plug connection

Series IGVU - Proximity switches





M12 / M18 / M30

One piece stainless steel housing

DC 10...30 V

**Shock resistant
Impact proof**



Design	DC PNP M12 • M18 • M30			DC 2-Wire M12 • M18 • M30					
Dimensions									
									
Operating distance sn [mm]	2	5	10	2	5	10			
Switching output PNP									
ID-No.	P31193	P31194	P31195	P31225	P31226	P31227			
Type	IGVU 02 GSP	IGVU 05 GSP	IGVU 10 GSP	IGVU 02 GS	IGVU 05 GS	IGVU 10 GS			
Supply voltage [V]	10...30 DC			8...30 DC					
Switching current [mA]	250			150					
Short circuit proof	•				•				
Reverse protection	•				•				
Voltage drop max. [V]	1.5			3.5					
Current consumption [mA]	5			1.5					
Switching frequency [Hz]	180	180	150	180	180	150			
Ambient temperature [°C]	-25...+80			-25...+80					
EMC-class	A			A					
Protection [EN 60529]	IP 68 + IP 69K			IP 68 + IP 69K					
LED display	•			•					
Housing material	AISI 316 L			AISI 316 L					
Connection	M12 connector			M12 connector					
The specified operating distance (sn) applies to ferromagnetic objects (ST37).									
Accessories	connecting cable type SLG 3-2 (Z01076), page 3.69								

Metal face sensors • Cable connection

Series IGV - Proximity switches




M12 / M18 / M30

One piece stainless steel housing


DC 10...30 V

**Shock resistant
Impact proof**



Design	DC PNP • M12x1	DC PNP • M18x1	DC PNP • M30x1.5
Dimensions			
Operating distance sn [mm]	2	5	10
Switching output PNP			
ID-No.	P31228	P31229	P31230
Type	IGV 02 GSP	IGV 05 GSP	IGV 10 GSP
Supply voltage [V]	10...30 DC		
Switching current [mA]	250		
Short circuit proof	•		
Reverse protection	•		
Voltage drop max. [V]	1.5		
Current consumption [mA]	max. 5		
Switching frequency [Hz]	180	180	150
Ambient temperature [°C]	-25...+80		
EMC-class	A		
Protection [EN 60529]	IP 67		
LED display	•		
Housing material	AISI 316 L		
Connection	2 m PVC-cable 3x0.34 mm ²		

The specified operating distance (sn) applies to ferromagnetic objects (ST37).



Metal face sensors • PTFE-coated

Series IGVU - Proximity switches




M12 / M18 / M30


One piece stainless steel housing

DC 10...30 V

**Shock resistant
Impact proof**



Design	DC PNP • M12x1	DC PNP • M18x1	DC PNP • M30x1.5
Dimensions			
Operating distance sn [mm]	2	5	10
Switching output PNP			
ID-No.	P31234	P31235	P31236
Type	IGVU 02 GSP-C	IGVU 05 GSP-C	IGVU 10 GSP-C
Supply voltage [V]	10...30 DC	250	
Switching current [mA]		•	
Short circuit proof		•	
Reverse protection		•	
Voltage drop max. [V]	1.5		
Current consumption [mA]	5		
Switching frequency [Hz]	180	180	150
Ambient temperature [°C]		-25...+80	
EMC-class		A	
Protection [EN 60529]		IP 68 + IP 69K	
LED display		•	
Housing material	AISI 316 L, PTFE-coated		
Connection	M12 connector		
	Design with fixed cable on request		
The specified operating distance (sn) applies to ferromagnetic objects (ST37).			
Accessories	connecting cable SLG 3-2 (Z01076), page 3.69		

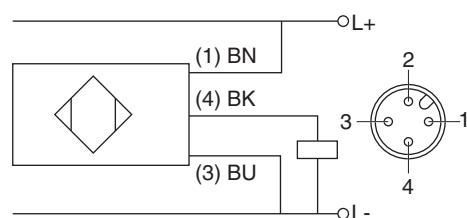

Metal face sensors • Climatic-proofed

Series IGVW - Proximity switches





M12 / M18 / M30

One piece stainless steel housing

DC 10...30 V

**Shock resistant
Impact proof**



Design	DC PNP • M12x1	DC PNP • M18x1	DC PNP • M30x1.5
Dimensions			
Operating distance sn [mm]	2	5	10
Switching output PNP			
ID-No.	P31237	P31238	P31239
Type	IGVW 02 GSP	IGVW 05 GSP	IGVW 10 GSP
Supply voltage [V]	10...30 DC		
Switching current [mA]	250		
Short circuit proof	•		
Reverse protection	•		
Voltage drop max. [V]	1.5		
Current consumption [mA]	5		
Switching frequency [Hz]	180	180	150
Ambient temperature [°C]		-10...+110	
EMC-class		A	
Protection [EN 60529]		IP 68 + IP 69K	
Housing material		AISI 316 L	
Connection		2 m FEP-cable 3x0.34 mm ²	
The specified operating distance (sn) applies to ferromagnetic objects (ST37).			

Mounting clamp • For metal face sensors





Series KBM 012 / KBM 018 / KBM 030

**Impact- and shock resistant,
protected installation**

**Simple adjustment
via slotted holes**

**Mount and replace sensor
quickly and precisely**

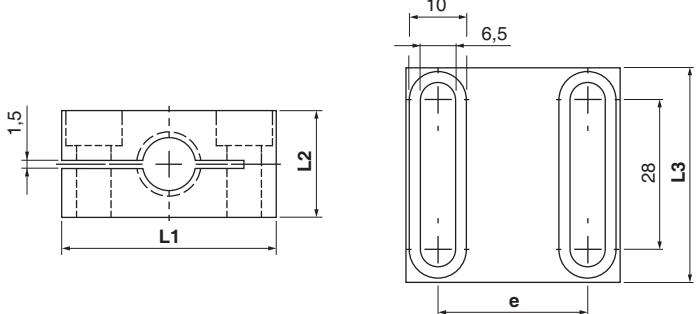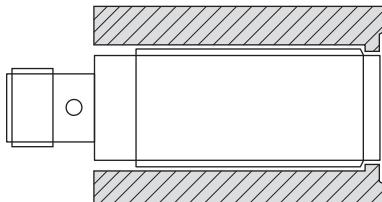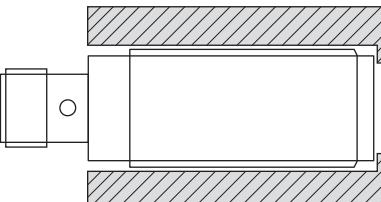

Design	KBM 012 • KBM 018 • KBM 030					
Dimensions						
ID-No.	Z01209	Z01210	Z01211	Z01212	Z01213	Z01214
Type	KBM 012 A-ST52	KBM 018 A-ST52	KBM 030 A-ST52	KBM 012 B-A2	KBM 018 B-A2	KBM 030 B-A2
For sensor design	M12	M18	M30	M12	M18	M30
Dimensions						
L1 x L2 x L3 [mm]	34 x 24 x 40	40 x 30 x 40	55 x 40 x 40	34 x 24 x 40	40 x 30 x 40	55 x 40 x 40
Hole spacing e [mm]	20	26	40	20	26	40
Sensor installation	flushed relative to the set back surface					
Housing material	ST52, hardened					
Note:	<p>Mounting clamps are fastened to their metal surface using M6 hexagon socket screws. Make sure that the provided stainless steel washers have been placed in-between.</p> 					
The typical torque is 6 Nm.	<p>flushed relative to the set back surface</p> 					
	<p>set back</p> 					

POLAR-Series DC • Climatic-proofed -60 °C

Series IGMP - Proximity switches

M12 / M18 / M30
Stainless steel sleeve

DC 10...30 V

IP 68 Water-proofed
IP 69K Resistant to high pressure cleaning



Design	DC PNP • M12x1	DC PNP • M18x1	DC PNP • M30x1.5
Dimensions			
Installation flush (f) non flush (nf)			
Operating distance sn [mm]	2 f	4 nf	5 f
Switching output PNP			
ID-No.	P31145	P31146	P31147
Type	IGMP 02 GSP	IGMP 04 GSP	IGMP 05 GSP
Supply voltage [V]	10...30 DC		
Switching current [mA]	200		
Short circuit proof	•		
Overcurrent release [mA]	230		
Reverse protection	•		
Voltage drop max. [V]	2		
Load current [mA]	-		
Current consumption [mA]	4		
Switching frequency [Hz]	1000		
Ambient temperature [°C]	-55...+60		
Temperature min. [°C]	-60		
Temperature gradient [K/min]	5		
EMC-class	A		
Protection [EN 60529]	IP 68 + IP 69K		
LED display	•		
Housing material	PTFE / AISI 316 Ti		
Connection	2 m FEP-cable 3x0.34 mm²		
Switching current			
mA			
-60 -30 0 30 60 °C			

POLAR-Series AC • Climatic-proofed -60 °C



Series IGMP - Proximity switches


M18
Stainless steel sleeve

AC 20...250 V

IP 68 Water-proofed
IP 69K Resistant to
high pressure cleaning



Design	AC • M18x1	
<i>Dimensions</i>		
Installation flush (f) non flush (nf)		
Operating distance sn [mm]	5 f	7 nf
Switching output		
ID-No.	P31149	P31150
Type	IGMP 005 WS	
Supply voltage [V]	20...250 AC	
Switching current [mA]	300	
Short circuit proof	-	
Overcurrent release [mA]	-	
Reverse protection	-	
Voltage drop max. [V]	4.5	
Load current [mA]	5	
Current consumption [mA]	2.5	
Switching frequency [Hz]	25	
Ambient temperature [°C]	-55...+60	
Temperature min. [°C]	-60	
Temperature gradient[K/min]	5	
EMC-class	A	
Protection [EN 60529]	IP 68 + IP 69K	
LED display	•	
Housing material	PTFE / AISI 316 Ti	
Connection	2 m FEP-cable 3x0.75 mm²	

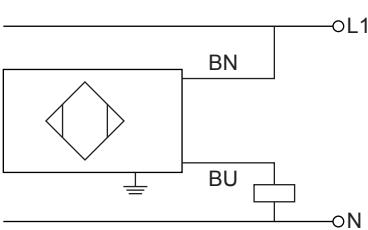

POLAR-Series • Climatic-proofed –80 °C

Series IGMP - Proximity switches


M30

Stainless steel sleeve

IP 68 Water-proofed

–80 °C permanent temperature



Design	M30x1.5
Dimensions	
Installation flush (f) non flush (nf)	
Operating distance sn [mm]	3 nf
ID-No.	P31337
Type	IGMP 030 S-80
Supply voltage [V]	–
Switching current [mA]	–
Hysteresis max. [%]	10
Short circuit proof	–
Reverse protection	–
Current consumption [mA]	–
Switching frequency [Hz]	–
Ambient temperature [°C]	–80...+50
EMC-class	A
Protection [EN 60529]	IP 68
LED display	–
Housing material	PTFE / AISI 316 Ti
Connection	2 m FEP-cable 3x0.75 mm ² , shielded
Sensor for the connection to amplifier IKM 120..., see page 3.33	

TROPICAL-Series DC • Climatic-proofed 120 °C







Series IGMF - Proximity switches

M12 / M18-short form
Stainless steel sleeve

DC 10...30 V

IP 68 Water-proofed
IP 69K Resistant to
high pressure cleaning

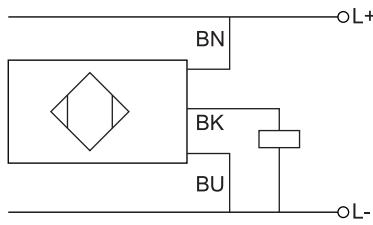

Design	DC PNP • M12x1		DC PNP • M18x1	
Dimensions				
Operating distance sn [mm]	2 f GSP  ID-No. P31132	4 nf IGMF 02 GSP  ID-No. P31133	5 f IGMF 04 GSP  ID-No. P30701	7 nf IGMF 08 GSP  ID-No. P30703
GOP  ID-No. P30702	Type IGMF 05 GSP	Type IGMF 05 GOP	Type P30704	Type IGMF 08 GOP
Supply voltage [V]	10...30 DC			
Switching current [mA]	200			
Overcurrent release [mA]	230			
Current consumption [mA]	4			
Residual current [μ A]	1			
Voltage drop max. [V]	2			
Switching frequency [Hz]	1000			
Ambient temperature [°C]	-25...+120			
Compressive strength [bar]	10			
Residual ripple max. [%]	10			
EMC-class	A			
Protection [EN 60529]	IP 68 + IP 69K			
Housing material	PTFE / AISI 316 Ti (A4)			
Connection	2 m FEP-cable 3x0.34 mm ²			
Switching current				
mA				
				

Inductive Sensors



TROPICAL-Series DC • Climatic-proofed 120 °C

Series IGMF - Proximity switches








M18 / M30




Stainless steel sleeve

DC 10...30 V

**IP 68 Water-proofed
IP 69K Resistant to
high pressure cleaning**



Design		DC PNP • M18x1		DC PNP • M30x1.5			
Dimensions		   					
Installation flush (f) non flush (nf)							
Operating distance sn [mm]		5 f	7 nf	10 f	15 nf		
GSP	ID-No. Type	P31424 IGMF 005 GSP	P31426 IGMF 008 GSP	P31428 IGMF 010 GSP	P31430 IGMF 015 GSP		
GOP	ID-No. Type	P31425 IGMF 005 GOP	P31427 IGMF 008 GOP	P31429 IGMF 010 GOP	P31431 IGMF 015 GOP		
GSOP	ID-No. Type	P30707 IGMF 005 GSOP	P30710 IGMF 008 GSOP	P30713 IGMF 010 GSOP	P30716 IGMF 015 GSOP		
Supply voltage [V]		10...30 DC					
Switching current [mA]		200					
Overcurrent release [mA]		230					
Current consumption [mA]		4					
Residual current [μ A]		1					
Voltage drop max. [V]		2					
Switching frequency [Hz]		1000					
Ambient temperature [$^{\circ}$ C]		-25...+120					
Compressive strength [bar]		10					
EMC-class		A					
Protection [EN 60529]		IP 68 + IP 69K					
Housing material		PTFE / AISI 316 Ti (A4)					
Connection		2 m FEP-cable 3x0.34 mm ² / 2 m FEP-cable 4x0.25 mm ²					
Switching current							
		GSP/GOP 			GSOP 		



TROPICAL-Series AC • Climatic-proofed 120 °C

Series IGMF - Proximity switches

M18 / M30

Stainless steel sleeve

AC 20...250 V

IP 68 Water-proofed

**IP 69K Resistant to
high pressure cleaning**



Design	AC • M18x1		AC • M30x1.5					
Dimensions								
Installation flush (f) non flush (nf)								
Operating distance sn [mm]	5 f	7 nf	10 f	15 nf				
WS 	ID-No. P31071	ID-No. P31073	ID-No. P31075	ID-No. P31077				
Type IGMF 005 WS		IGMF 008 WS	IGMF 010 WS	IGMF 015 WS				
WO 	ID-No. P31070	ID-No. P31072	ID-No. P31074	ID-No. P31076				
Type IGMF 005 WO		IGMF 008 WO	IGMF 010 WO	IGMF 015 WO				
Supply voltage WS/WO [V]	20...250 AC							
Switching current WS/WO [mA]	< 400							
Current consumption [mA]	< 2.5							
Voltage drop max. [V]	< 5 eff.							
Switching frequency [Hz]	25							
Ambient temperature [°C]	-25...+120							
Compressive strength [bar]	10							
Minimum load current [mA]	5.0							
EMC-class	A							
Protection [EN 60529]	IP 68 + IP 69K							
Housing material	PTFE / AISI 316 Ti (A4)							
Connection	2 m FEP-cable 3x0.75 mm²							
Switching current								

TROPICAL-Series DC • Climatic-proofed 120 °C

Series IGMW - Proximity switches

M12 / M18-short form

Stainless steel sleeve

DC 10...30 V

IP 68 Water-proofed

**IP 69K Resistant to
high pressure cleaning
Steam proof**



Design	DC PNP • M12x1		DC PNP • M18x1	
Dimensions				
Installation flush (f) non flush (nf)				
Operating distance sn [mm]	2 f	4 nf	5 f	7 nf
GSP	ID-No. Type	P31338 IGMW 02 GSP	P31339 IGMW 04 GSP	P31340 IGMW 05 GSP
GOP	ID-No. Type		P31342 IGMW 05 GOP	P31343 IGMW 08 GOP
Supply voltage [V]			10...30 DC	
Switching current [mA]			200	
Overcurrent release [mA]			230	
Current consumption [mA]			4	
Residual current [μ A]			1	
Voltage drop max. [V]			2	
Switching frequency [Hz]			1000	
Ambient temperature [°C]			-25...+120	
Compressive strength [bar]			4	
Residual ripple max. [%]			10	
EMC-class			A	
Protection [EN 60529]		IP 68 + IP 69K		
Housing material		PTFE / AISI 316 Ti (A4)		
Connection		2 m FEP-cable 3x0.34 mm ²		
Switching current				
mA				

TROPICAL-Series DC • Climatic-proofed 120 °C

Series IGMW - Proximity switches

M18 / M30

Stainless steel sleeve

DC 10...30 V

IP 68 Water-proofed

**IP 69K Resistant to
high pressure cleaning
Steam proof**



Design	DC PNP • M18x1		DC PNP • M30x1,5					
Dimensions								
Installation flush (f) non flush (nf)								
Operating distance sn [mm]	5 f	7 nf	10 f	15 nf				
GSP	ID-No. P31432 Type IGMW 005 GSP	ID-No. P31434 Type IGMW 008 GSP	ID-No. P31436 Type IGMW 010 GSP	ID-No. P31438 Type IGMW 015 GSP				
GOP	ID-No. P31433 Type IGMW 005 GOP	ID-No. P31435 Type IGMW 008 GOP	ID-No. P31437 Type IGMW 010 GOP	ID-No. P31439 Type IGMW 015 GOP				
GSOP	ID-No. P31352 Type IGMW 005 GSOP	ID-No. P31353 Type IGMW 008 GSOP	ID-No. P31354 Type IGMW 010 GSOP	ID-No. P31355 Type IGMW 015 GSOP				
Supply voltage [V]	10...30 DC							
Switching current [mA]	200							
Overcurrent release [mA]	230							
Current consumption [mA]	4							
Residual current [μ A]	1							
Voltage drop max. [V]	2							
Switching frequency [Hz]	1000							
Ambient temperature [°C]	-25...+120							
Compressive strength [bar]	4							
EMC-class	A							
Protection [EN 60529]	IP 68 + IP 69K							
Housing material	PTFE / AISI 316 Ti (A4)							
Connection	2 m FEP-cable 3x0.34 mm ² / 2 m FEP-cable 4x0.25 mm ²							
Switching current								
mA								
-30 0 30 60 90 120 °C								
GSP/GOP								
GSOP								

TROPICAL-Series AC • Climatic-proofed 120 °C

Series IGMW - Proximity switches

M18 / M30

Stainless steel sleeve

AC 20...250 V

IP 68 Water-proofed

**IP 69K Resistant to
high pressure cleaning
Steam proof**



Design	AC • M18x1		AC • M30x1.5	
Dimensions				
Installation flush (f) non flush (nf)				
Operating distance sn [mm]	5 f	7 nf	10 f	15 nf
WS	ID-No. P31356	ID-No. P31357	ID-No. P31358	ID-No. P31359
WO	Type IGMW 005 WS	Type IGMW 008 WS	Type IGMW 010 WS	Type IGMW 015 WS
Supply voltage	WS/WO [V]	20...250 AC		
Switching current	WS/WO [mA]	<400		
Current consumption	[mA]	<2.5		
Voltage drop max.	[M]	<5 eff.		
Switching frequency	[Hz]	25		
Ambient temperature	[°C]	-25...+120		
Compressive strength	[bar]	4		
Minimum load current	[mA]	5.0		
EMC-class		A		
Protection	[EN 60529]	IP 68 + IP 69K		
Housing material		PTFE / AISI 316 Ti (A4)		
Connection		2 m FEP-cable 3x0.75 mm²		
Switching current				

TROPICAL-Series DC • Resistant to rolling oil

Series IGFW / INFW - Proximity switches

PTFE housing


DC 10...30 V

IP 68 Water-proofed

**IP 69K Resistant to
high pressure cleaning**



Design	DC PNP • M30x1.5					DC • Ø 35
Dimensions						
Installation flush (f) non flush (nf)						
Operating distance sn [mm]	10 f	10 f	14 nf	14 nf	19 nf	
Switching output (DC PNP)						
ID-No.	P31440	P31455	P31441	P31456	P31442	
Type	IGFW 010 GSP	IGFW 010 GOP	IGFW 015 GSP	IGFW 015 GOP	INFW 020 GSP	
Supply voltage [V]	10...30 DC					
Switching current [mA]	< 200					
Surge current [mA]	short circuit protection					
Current consumption [mA]	4					
Inverse current max. [µA]	1					
Voltage drop [V]	2					
Ambient temperature [°C]	-25...+120					
Temperature deviation [%]	10 (-25...+70 °C), 20 (-25...+120 °C)					
Overcurrent release approx. [mA]	230					
Reverse Protection	•					
Minimum load current [mA]	-					
EMC-class	A					
Switching frequency [Hz]	1000					500
Protection [EN 60529]	IP 68 + IP 69K					
Housing material	PTFE					
Connection	2 m FEP-cable 0.34 mm ²					
Switching current						
mA						
Accessories	nut M30x1.5 (Z00120), clamp Ø 35 (Z00125), page 3.71					

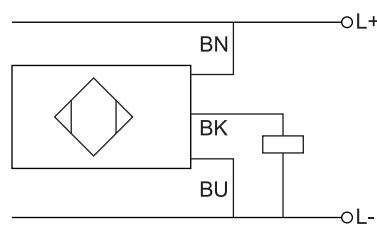

Inductive Sensors



TROPICAL-Series AC • Resistant to rolling oil

Series IGFW / INFW - Proximity switches

PTFE housing



AC 20...250 V

IP 68 Water-proofed

**IP 69K Resistant to
high pressure cleaning**



Design	AC • M30x1.5	AC • Ø 35
Dimensions		
Installation flush (f) non flush (nf)		
Operating distance sn [mm]	10 f	14 nf
Switching output		
ID-No.	P30626	P30638
Type	IGFW 010 WS	IGFW 015 WS
Supply voltage [V]	20...250 AC	
Switching current [mA]	< 400	
Current consumption [mA]	2.5	
Voltage drop [V]	5 eff.	
Switching frequency [Hz]	20	
Ambient temperature [°C]	-25...+120	
Temperature deviation [%]	10 (-25...+70 °C), 20 (-25...+120 °C)	
Minimum load current [mA]	5.0	
EMC-class	A	
Protection [EN 60529]	IP 68 + IP 69K	
Housing material	PTFE	
Connection	2 m Silicone-cable 0.75 mm ²	
Switching current		

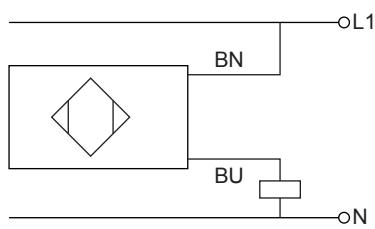

Accessories

nut M30x1.5 (Z00120), clamp Ø 35 (Z00125), page 3.71

TROPICAL-Series • Resistant to rolling oil





Series IGMF / INFW - Proximity switches

DC 10...55 V

**Climatic-proofed
Resistant to acid**

**Armoured cable
with IP 68-plug**

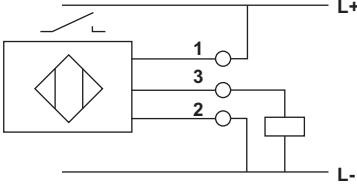

Design	DC PNP • M30x1.5	DC PNP • Ø 35
<i>Dimensions</i>		
Operating distance sn [mm]	10 f	20 nf
Switching output PNP		
ID-No.	P31443	P31444
Type	IGMF 010 GSP-PZ	INFW 020 GSP-PZ
Supply voltage [V]	10...30 DC	10...30 DC
Switching current max. [mA]	200	200
Current consumption [mA]	4	4
Switching frequency [Hz]	1000	500
Ambient temperature [°C]	-25...+120	-25...+120
Compressive strength [bar]	10	-
Protection [EN 60529]	IP 68 + IP 69K	IP 68 + IP 69K
Function indicator	LED	LED
Housing material	PTFE, AISI 316 Ti	PTFE
Connection	5 m FEP-cable 3x0.34mm ² armoured cable	5 m FEP-cable 3x0.34mm ² armoured cable
Plug, Lemo series K, 3-pol		
Sensors without plug on request		
Accessories	junction box GS..., page 3.24	

Junction box • Resistant to rolling oil

Series GS 125 / GS 175 / GS 250

Connection of sensors with armoured cable

IP 68-plug



Design	GS 125	GS 175	GS 250
Dimensions			
ID-No.	P31212	P31217	P31218
Type	GS 125	GS 175	GS 250
Connectable sensors	2	3	4
Supply voltage [V]	10...55 DC	10...55 DC	10...55 DC
Ambient temperature [°C]	-20...+75	-20...+75	-20...+75
Protection [EN 60529]	IP 68	IP 68	IP 68
Housing material	Aluminium	Aluminium	Aluminium
Connection	10 m TPE-numbered cable 7x0.5mm²	10 m TPE-numbered cable 7x0.5mm²	10 m TPE-numbered cable 7x0.5mm²
Plug, Lemo series K, 3-pol			

High temperature 120 °C

Series **IGMT** - Proximity switches








M12 / M18 / M30


Metal sleeve

DC 10...48 V

**Extended
temperature range
-25 °C...+120 °C**



Design	DC PNP • M12x1	DC PNP • M18x1	DC PNP • M30x1.5
Dimensions			
Installation flush (f) non flush (nf)			
Operating distance sn [mm]	2 f	4 nf	5 f
Switching output PNP			
ID-No.	P31282	P31283	P31290
Type	IGMT 02 GSP	IGMT 04 GSP	IGMT 005 GSP
Supply voltage [V]	10...48 DC		
Switching current [mA]	200		
Short circuit proof	•		
Reverse protection	•		
Voltage drop max. [V]	2		
Current consumption [mA]	4		
Switching frequency [Hz]	500		
Ambient temperature [°C]	-25...+120		
EMC-class	A		
Protection [EN 60529]	IP 67		
LED display	•		
Housing material	Br-Ni / PBT		
Connection	2 m Silicone-cable 3x0.34 mm²		
Switching current			
mA			
Notes	design with M12 connector on request		

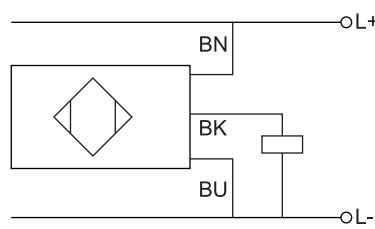

Inductive Sensors



High temperature 120 °C

Series **IGMT** - Proximity switches

M18 / M30

Metal sleeve

AC 20...250 V

**Extended
temperature range
-25 °C...+120 °C**



Design	AC • M18x1	AC • M30x1.5
Dimensions		
Installation flush (f) non flush (nf)		
Operating distance sn [mm]	5 f	8 nf
Switching output		
ID-No.	P31118	P31119
Type	IGMT 005 WS	IGMT 008 WS
Supply voltage [V]	20...250 AC	
Switching current [mA]	200	
Short circuit proof	-	
Reverse protection	-	
Voltage drop max. [V]	5 eff.	
Minimum load current [mA]	5	
Current consumption [mA]	2.5	
Switching frequency [Hz]	25	
Ambient temperature [°C]	-25...+120	
EMC-class	A	
Protection [EN 60529]	IP 67	
LED display	•	
Housing material	Br-Ni / PBT	
Connection	2 m Silicone-cable 3x0.75 mm ²	
Switching current		
mA		
-30 0 30 60 90 120 °C		

Inductive Sensors



High temperature 120 °C

Series IDT - Proximity switches

DC 10...55 V
AC 20...250 V

**Extended
sensing range**



Design	Ø 80 mm		Ø 105 mm		Ø 160 mm							
Dimensions												
Installation non flush (nf)												
Operating distance sn [mm]	50 nf	45 nf	80 nf	60 nf	110 nf	100 nf						
Switching output (DC PNP)												
ID-No.	P31276	P31279	P31277	P31280	P31278	P31281						
Type	IDT 080 GSP	IDT 080 WS	IDT 105 GSP	IDT 105 WS	IDT 160 GSP	IDT 160 WS						
Supply voltage [V]	10...55 DC	20...250 AC	10...55 DC	20...250 AC	10...55 DC	20...250 AC						
Switching current [mA]	400	400	400	400	400	400						
Short circuit proof	•	-	•	-	•	-						
Reverse protection	•	-	•	-	•	-						
Voltage drop max. [V]	2	5 eff.	2	5 eff.	2	5 eff.						
Minimum load current [mA]	-	5	-	5	-	5						
Current consumption [mA]	4	2.5	4	2.5	4	2.5						
Switching frequency [Hz]	20	10	20	10	20	10						
Ambient temperature [°C]	-25...+120											
EMC-class	A											
Protection [EN 60529]	IP 67											
Housing material	PBT / Aluminium											
Connection	2 m Silicone-cable 3x0.34 mm ²	2 m Silicone-cable 2x0.75 mm ²	2 m Silicone-cable 3x0.34 mm ²	2 m Silicone-cable 2x0.75 mm ²	2 m Silicone-cable 3x0.34 mm ²	2 m Silicone-cable 2x0.75 mm ²						
Switching current												

Inductive Sensors



High temperature 160 °C

Series IGMH - Proximity switches

M12 / M18 / M30

Stainless steel sleeve

DC 10...30 V

IP 68 Water-proofed



IP 69K Resistant to

high pressure cleaning



Design	DC PNP • M12x1	DC PNP • M18x1	DC PNP • M30x1.5
Dimensions			
Installation flush (f) non flush (nf)			
Operating distance sn [mm]	2 f	4 nf	5 f
Switching output PNP			
ID-No.	P31288	P31289	P31161
Type	IGMH 02 GSP	IGMH 04 GSP	IGMH 005 GSP
Supply voltage [V]	10...30 DC		
Switching current [mA]	200		
Short circuit proof	•		
Reverse protection	•		
Voltage drop max. [V]	2		
Residual current max. [mA]	0.02		
Current consumption (not actuated) [mA]	7		
Switching frequency [Hz]	200		
Temperature deviation [%]	15		
Ambient temperature [°C]	-25...+150		-25...+160
EMC-class	A		
Protection [EN 60529]	IP 68 + IP 69K		
LED display	-		
Housing material	AISI 316 Ti / PEEK		
Connection	2 m FEP-cable 3x0.34 mm²		

Switching current

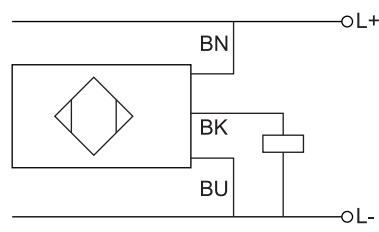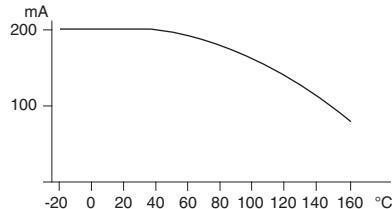

Notes

temperature depending parameters are described in the technical manual

High temperature 160 °C

Series IGMH - Proximity switches



M12 / M18 / M30
Stainless steel sleeve

DC 10...30 V

Moisture resistant
Silicone-cable



Design	DC PNP • M12x1	DC PNP • M18x1	DC PNP • M30x1.5
Dimensions			
Installation flush (f) non flush (nf)			
Operating distance sn [mm]	2 f	4 nf	5 f
Switching output PNP			
ID-No.	P31299	P31300	P31301
Type	IGMH 02 GSP-K	IGMH 04 GSP-K	IGMH 005 GSP-K
Supply voltage [V]			10...30 DC
Switching current [mA]			200
Short circuit proof			•
Reverse protection			•
Voltage drop max. [V]			2
Residual current max. [mA]			0.02
Current consumption (not actuated) [mA]			7
Switching frequency [Hz]			200
Temperature deviation [%]			15
Ambient temperature [°C]	-25...+150		-25...+160
EMC-class			A
Protection [EN 60529]			IP 67
LED display			-
Housing material			AISI 316 Ti / PEEK
Connection			2 m Silicone-cable 3x0.34 mm²

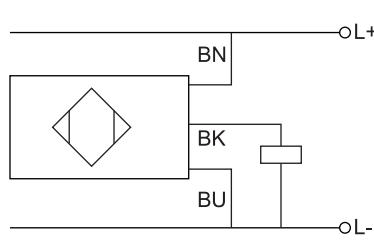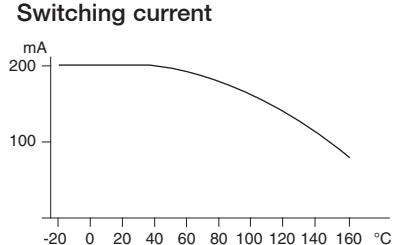

Notes

temperature depending parameters are described in the technical manual

Inductive Sensors








High temperature 250 °C



Series IRH / IDH - Proximity sensor

Armoured cable

With connector for cable amplifier

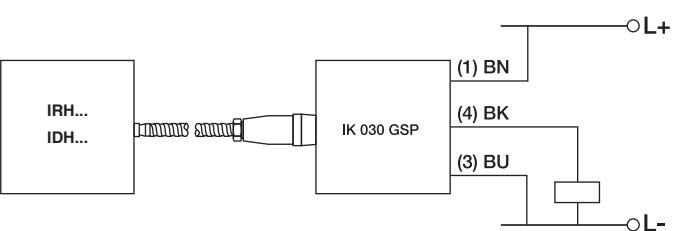

Design	Cuboid 40 mm	$\varnothing 80 \text{ mm}$	DC PNP • M30x1.5
Dimensions			
Installation non flush (nf)			
Operating distance sn [mm]	20 nf, adjustable	40 nf, adjustable	amplifier
Switching output PNP			
ID-No.	P31294	P31295	P31204
Type	IRH 040 S250	IDH 080 S250	IK 030 GSP
Supply voltage [V]	–	–	10...30
Switching current [mA]	–	–	200
Current consumption [mA]	–	–	15
Voltage drop max. [V]	–	–	1.5
Ambient temperature [°C]	sensor: 0...+250 plug: -20...+70	–	0...+70
Short circuit proof	–	–	•
Reverse protection	–	–	•
EMC-class	A	–	A
Switching frequency [Hz]	30	–	30
Protection [EN 60529]	IP 60	–	IP 67
Function indicator	–	–	LED yellow
Stand-by indicator	–	–	LED green
Housing material	Aluminium / PEEK	–	AISI 316 Ti
Connection cable	5 m FEP-cable, Ø 8 mm armoured cable	–	–
Connection	M12 connector	–	M12 connector
t x1000 [h]			
Accessories			connecting cable SLG 3-2 (Z01076), page 3.69

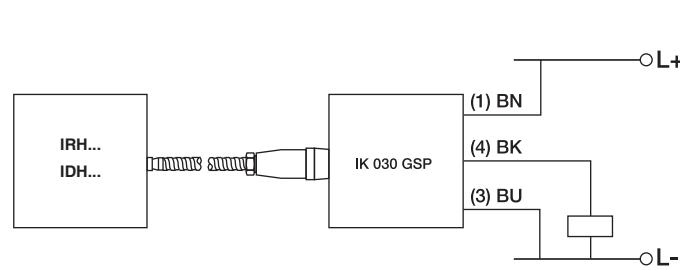

Accessories

connecting cable SLG 3-2 (Z01076), page 3.69

High temperature 250 °C



Series IGHS / IRHS / IDHS - Proximity sensor

Armoured cable

**With connector for
cable amplifier and sensor**



Design	M30x1.5	Cuboid 40 mm	Ø 80 mm
Dimensions			
Installation non flush (nf)			
Operating distance sn [mm]	15 nf, adjustable	20 nf, adjustable	40 nf, adjustable
ID-No.	P31298	P31296	P31297
Type	IGHS 030 S250	IRHS 040 S250	IDHS 080 S250
Supply voltage [V]		-	
Switching current [mA]		-	
Current consumption [mA]		-	
Voltage drop [V]		-	
Ambient temperature [°C]		0...+250	
Short circuit proof		-	
Reverse protection		-	
EMC-class		A	
Switching frequency [Hz]		30	
Protection [EN 60529]		IP 60	
Housing material	AISI 316 Ti / PEEK	Aluminium / PEEK	
Connection		M12 connector	
Connection cable (Accessories)	5 m FEP-cable, Ø 8 mm armoured cable (KAP 08-DS5, Z01190)		

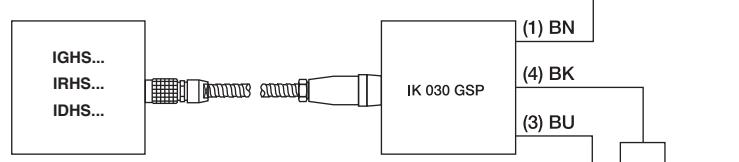

Accessories


connecting cable SLG 3-2 (Z01076), page 3.69

High temperature 200 °C

Series INT - Proximity sensor

PTFE housing



Design	INT020-S200		INT100-S180			
Dimensions						
Operating distance sn [mm]	15 nf		50 nf			
Adjustable range [mm]	5...20		10...80			
ID-No.	P31101	P30411	P31103	P30427		
Type	INT020-S200 K	INT020-S200 GC	INT100-S180 K	INT100-S180 GC		
Limiting temperature [°C]	250		200			
Nominal temperature [°C]	200		180			
Temperature deviation [mm/°C] (not linear)	0.05		0.06			
EMC-class	B					
Protection [EN 60529]	IP 40					
Housing material	PTFE					
Mounting	Aluminium plate					
Sensing material [ST 37]	40x40x1		100x100x1			
Connecting cable	5 m PTFE shielded					
Connection and required Amplifier	clamp connection IKM 120 GPP	plug C 16 IU 130...	clamp connection IKM 120 GPP	plug C 16 IU 130...		
Special notes	If the ambient temperature exceeds 230 °C, there might be failed reactions from the sensor, but it will not be destroyed by this. The inductive high temperature proximity switches must be used with an amplifier. The connection cable can be up to 10 m long. We can supply the cable with a flexible aluminium tube on request.					
Connection diagram	Sensor-Connection sensors INT...K to IKM 120 GPP			Plug C 16: connection for Sensors INT...to IU 130...		
Amplifiers see page 3.33 - 3.34						
Temperature depending parameters are described in the technical manual						
Accessories	plug C 16					

Amplifier

Series IKM

For the connection of separate sensors for extreme temperatures


LED display




Design

Dimensions

IKM 120 GSOP

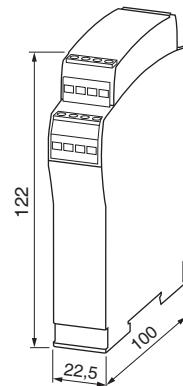

ID-No.	P31334
Type	IKM 120 GSOP
Switching output	 PNP
Supply voltage [V]	24 V DC ±20%
Switching current [mA]	400
Short circuit proof	•
Current consumption [mA]	max. 18
Operating distance	adjustable
Hysteresis max. [%]	10
Switching frequency [Hz]	100
Ambient temperature [°C]	-25...+75
EMC-class	A
Protection [EN 60529]	terminal: IP 20 / housing: IP 40
Function indicator	LED yellow
Stand-by indicator	LED green
Housing material	PA
Connection sensor	terminal screws
Connection Amplifier	terminal screws

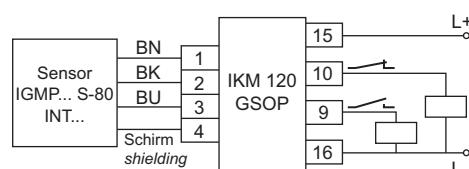

Amplifiers

Series IU

For the connection of separate sensors


LED display



Design


IU 130...

Dimensions




ID-No.	P30438	P30439
Type	IU 130 WP	IU 130 GPP
Supply voltage [V]	230 AC $\pm 10\%$	24 DC $\pm 10\%$
Switching current [mA]	400	
Short circuit proof	—	
Current consumption [mA]	15	
Operating distance	adjustable	
Hysteresis max. [%]	adjustable	
Output	programmable	
Switching frequency [Hz]	5	15
Ambient temperature [°C]	–20...+70	
EMC-class	A	
Protection [EN 60529]	IP 67	
Function indicator	LED yellow	
Stand-by indicator	LED green	
Housing material	PBT	
Connection sensor	C 16 plug connection	
Connection amplifier	2 m PVC-cable 4x0.75 mm ²	2 m PVC-cable 3x0.50 mm ²

connection amplifier



connection amplifier



Accessories

external plug C 16 (Z00039)

Demanding environment

Series IGM - Proximity switches

M12 / M18 / M30




Metal sleeve



DC 10...48 V

Short form

Increased EMC



Design	DC PNP • M12x1	DC PNP • M18x1	DC PNP • M30x1.5			
Dimensions						
Installation flush (f) non flush (nf)	65 LED	42 17 LED	54 13 8 24 LED			
Operating distance sn [mm]	2 f	4 nf	5 f			
GSP	 ID-No. P31246	 ID-No. P31247	 ID-No. P31305	 ID-No. P31306	 ID-No. P31307	 ID-No. P31308
GSOP	 ID-No. -	 ID-No. -	 ID-No. P31250	 ID-No. P31251	 ID-No. P31254	 ID-No. P31255
Supply voltage [V]	10...48 DC					
Switching current [mA]	200					
Short circuit proof	•					
Reverse protection	•					
Voltage drop max. [V]	2					
Current consumption [mA]	2.5					
Switching frequency [Hz]	500					
Ambient temperature [°C]	-25...+75					
EMC-class	A					
Protection [EN 60529]	IP 67					
LED display	•					
Housing material	Br-Ni / PBT					
Connection	M12 connector					

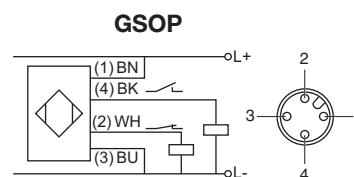

Accessories

connecting cable SLG 3-2 (GSP) / SLG 4-2 (GSOP), page 3.69

Demanding environment

Series IGM - Proximity switches

M12 / M18 / M30

Metal sleeve

DC 10...48 V


Short form

Increased EMC




Design	DC PNP • M12x1	DC PNP • M18x1	DC PNP • M30x1.5
Dimensions			
Installation flush (f) non flush (nf)			
Operating distance sn [mm]	2 f GSP 	4 nf P31244 IGM 02 GSP	5 f P31309 IGM 05 GSP
GSOP 	ID-No. Type —	ID-No. Type —	P31248 IGM 05 GSOP
Supply voltage [V]	10...48 DC		
Switching current [mA]	200		
Short circuit proof	•		
Reverse protection	•		
Voltage drop max. [V]	2		
Current consumption [mA]	2.5		
Switching frequency [Hz]	500		
Ambient temperature [°C]	-25...+75		
EMC-class	A		
Protection [EN 60529]	IP 67		
LED display	•		
Housing material	Br-Ni / PBT		
Connection	GSP: 2 m PVC-cable 3x0.34 mm ²	GSOP: 2 m PVC-cable 4x0.34 mm ²	

GSP



GSOP



Demanding environment

Series IGM - Proximity switches

M18 / M30
Metal sleeve

DC 10...48 V
AC 20...250 V

Long form



Increased EMC

Design	DC PNP • M18x1	DC PNP • M30x1.5	AC • M30x1.5 programmable				
Dimensions							
Installation flush (f) non flush (nf)							
Operating distance sn [mm]	5 f GSP 	8 nf P31313 ID-No. IGMU 005 GSP Type	10 f P31314 ID-No. IGMU 008 GSP Type	15 nf P31315 ID-No. IGMU 010 GSP Type	10 f P31316 ID-No. IGMU 015 GSP Type	15 nf P31263 ID-No. IGMU 015 GSOP Type	
GSOP		P31258 ID-No. IGMU 005 GSOP Type	P31259 ID-No. IGMU 008 GSOP Type	P31262 ID-No. IGMU 010 GSOP Type	P31263 ID-No. IGMU 015 GSOP Type		
WP		-	-	-	-	P30015 ID-No. IGMS 010 WP Type	P30019 ID-No. IGMS 015 WP Type
Supply voltage [V]	10...48 DC			20...250 AC			
Switching current [mA]	200			400			
Short circuit proof	•			3000 mA/10 ms			
Reverse protection	•			-			
Voltage drop max. [V]	2			6			
Minimum load current [mA]	-			5			
Current consumption [mA]	2.5			2.5			
Switching frequency [Hz]	500			25			
Ambient temperature [°C]	-25...+75			-25...+75			
EMC-class	A			A			
Protection [EN 60529]	IP 67			IP 67			
LED display	•			•			
Housing material	Br-Ni / PBT			Br-Ni / PBT			
Connection	M12 connector			PG-plug connection 2 m PVC-cable 3x0.5 mm ²			
Accessories	connecting cable SLG 3-2 (GSP) / SLG 4-2 (GSOP), page 3.69						
	 1: BN 2: WH 3: BU 4: BK	 1: BN 2: WH 3: BU 4: BK	 1: BN 2: BU 3: BU 4: BK				

Demanding environment

Series IGM - Proximity switches




M18 / M30
Metal sleeve

DC 10...48 V
AC 20...250 V


Long form




Increased EMC

Design	DC PNP • M18x1	DC PNP • M30x1.5	AC • M30x1.5
Dimensions			
Installation flush (f) non flush (nf)	LED 24 82 8 GSP	LED 24 64 8 GSOP	LED 36 64 10 WS
Operating distance sn [mm]	5 f P31317 IGM 005 GSP	8 nf P31318 IGM 008 GSP	10 f P31319 IGM 010 GSP
GSP	ID-No. Type	P31320 IGM 015 GSP	15 nf P31261 IGM 015 GSOP
GSOP	ID-No. Type	P31256 IGM 005 GSOP	P31257 IGM 008 GSOP
WS	ID-No. Type	P31260 IGM 010 GSOP	P31261 IGM 015 GSOP
Supply voltage [V]	10...48 DC		20...250 AC
Switching current [mA]	200		400
Short circuit proof	•		3000 mA/10 ms
Reverse protection	•		—
Voltage drop max. [V]	2		6
Minimum load current [mA]	—		5
Current consumption [mA]	2.5		2.5
Switching frequency [Hz]	500		25
Ambient temperature [°C]	-25...+75		-25...+75
EMC-class	A		A
Protection [EN 60529]	IP 67		IP 67
LED display	•		•
Housing material	Br-Ni / PBT		Br-Ni / PBT
Connection	GSP: 2 m PVC-cable, 3x0.34 mm ² GSOP: 2 m PVC-cable, 4x0.34 mm ²		2 m PVC-cable 3x0.5 mm ²


GSP



GSOP



WS



Demanding environment

Series ID - Proximity switches







Ø80 mm

DC 10...55 V
AC 20...250 V

Sensing range adjustable

Increased EMC



Design	DC PNP • Ø80 mm	DC PNP • Ø80 mm	AC • Ø80 mm programmable
Dimensions			
Operating distance s_n [mm] (Adjustable range)	55 nf (25...80)	55 nf (25...80)	55 nf (25...80)
GSP  ID-No. Type	P31321 IDU 080 GSP	P31322 ID 080 GSP	-
GSOP  ID-No. Type	P31264 IDU 080 GSOP	P31265 ID 080 GSOP	-
WP  ID-No. Type	-	-	P31266 IDS 080 WP
Supply voltage [V]	10...55 DC	10...55 DC	20...250 AC
Switching current [mA]	400	400	400
Short circuit proof	•	•	3000 mA/10 ms
Reverse protection	•	•	-
Voltage drop max. [V]	2	2	6 eff.
Minimum load current [mA]	-	-	8
Current consumption [mA]	4	4	2.5
Switching frequency [Hz]	20	20	10
Ambient temperature [°C]	-25...+75	-25...+75	-25...+75
EMC-class	A	A	A
Protection [EN 60529]	IP 67	IP 67	IP 67
LED display	•	•	•
Housing material	PBT	PBT	PBT
Connection	M12 connector	GSP: 2 m PVC-cable, 3x0.5 mm ² GSOP: 2 m PVC-cable, 4x0.5 mm ²	PG-plug connection 2 m, 2x0.75 mm ² , PVC
			
Accessories	connecting cable SLG 3-2 (GSP) / SLG 4-2 (GSOP), page 3.69		

Demanding environment

Series ID - Proximity switches

Ø 105 mm

DC 10...55 V
AC 20...250 V

Sensing range adjustable

Increased EMC



Design	DC PNP • Ø 105 mm	DC PNP • Ø 105 mm	AC • Ø 105 mm programmable
Dimensions			
Installation non flush (nf)			
Operating distance sn [mm] (Adjustable range)	100 nf (20...110)	100 nf (20...110)	70 nf (20...110)
GSP	ID-No. Type P31323 IDU 105 GSP	ID-No. Type P31267 IDU 105 GSOP	ID-No. Type P31268 ID 105 GSOP
GSOP			
WP			P31269 IDS 105 WP
Supply voltage [V]	10...55 DC	10...55 DC	20...250 AC
Switching current [mA]	400	400	400
Short circuit proof	•	•	3000 mA/10 ms
Reverse protection	•	•	–
Voltage drop max. [V]	2	2	6 eff.
Minimum load current [mA]	–	–	8
Current consumption [mA]	4	4	2.5
Switching frequency [Hz]	20	20	10
Ambient temperature [°C]	-25...+75	-25...+75	-25...+75
EMC-class	A	A	A
Protection [EN 60529]	IP 67	IP 67	IP 67
LED display	•	•	•
Housing material	PBT	PBT	PBT
Connection	M12 connector	GSP: 2 m PVC-cable, 3x0.5 mm ² GSOP: 2 m PVC-cable, 4x0.5 mm ²	PG-plug connection 2 m, 2x0.75 mm ² , PVC
Accessories	connecting cable SLG 3-2 (GSP) / SLG 4-2 (GSOP), page 3.69		

Demanding environment

Series ID - Proximity switches

Ø 160 mm




DC 10...55 V





AC 20...250 V

Sensing range adjustable

Increased EMC



Design	DC PNP • Ø 160 mm	DC PNP • Ø 160 mm	AC • Ø 160 mm programmable
Dimensions			
Installation non flush (nf)			
Operating distance sn [mm] (Adjustable range)	120 nf (20...150)	120 nf (20...150)	120 nf (20...150)
GSP	 ID-No. P31325 Type IDU 160 GSP	 ID-No. P31270 Type IDU 160 GSOP	 ID-No. - Type IDS 160 WP
GSOP			
WP			
Supply voltage [V]	10...55 DC	10...55 DC	20...250 AC
Switching current [mA]	400	400	400
Short circuit proof	•	•	3000 mA/10 ms
Reverse protection	•	•	-
Voltage drop max. [V]	2	2	6 eff.
Minimum load current [mA]	-	-	8
Current consumption [mA]	4	4	2.5
Switching frequency [Hz]	20	20	10
Ambient temperature [°C]	-25...+75	-25...+75	-25...+75
EMC-class	A	A	A
Protection [EN 60529]	IP 67	IP 67	IP 67
LED display	•	•	•
Housing material	PBT / Aluminium	PBT / Aluminium	PBT / Aluminium
Connection	M12 connector	GSP: 2 m PVC-cable, 3x0.5 mm ² GSOP: 2 m PVC-cable, 4x0.5 mm ²	PG-plug connection 2 m, 2x0.75 mm ² , PVC
Accessories	connecting cable SLG 3-2 (GSP) / SLG 4-2 (GSOP), page 3.69		



Demanding environment

Series ID - Proximity switches

Ø 200 mm

DC 10...55 V
AC 20...250 V

Sensing range adjustable

Increased EMC



Design	DC PNP • Ø 200 mm	DC PNP • Ø 200 mm	AC • Ø 200 mm programmable
Dimensions			
Installation non flush (nf)			
Operating distance sn [mm] (Adjustable range)	140 nf (40...170)	140 nf (40...170)	140 nf (40...170)
GSP 	ID-No. Type P31327 IDU 200 GSP	ID-No. Type P31328 ID 200 GSP	-
GSOP 	ID-No. Type P31273 IDU 200 GSOP	ID-No. Type P31274 ID 200 GSOP	-
WP 	ID-No. Type - -	ID-No. Type - -	P31275 IDS 200 WP
Supply voltage [V]	10...55 DC	10...55 DC	20...250 AC
Switching current [mA]	400	400	400
Short circuit proof	•	•	3000 mA/10 ms
Reverse protection	•	•	-
Voltage drop max. [V]	2	2	6 eff.
Minimum load current [mA]	-	-	8
Current consumption [mA]	4	4	2.5
Switching frequency [Hz]	20	20	10
Ambient temperature [°C]	-25...+75	-25...+75	-25...+75
EMC-class	A	A	A
Protection [EN 60529]	IP 67	IP 67	IP 67
LED display	•	•	•
Housing material	PBT / Aluminium	PBT / Aluminium	PBT / Aluminium
Connection	M12 connector	GSP: 2 m PVC-cable, 3x0.5 mm ² GSOP: 2 m PVC-cable, 4x0.5 mm ²	PG-plug connection 2 m, 2x0.75 mm ² , PVC
Accessories	connecting cable SLG 3-2 (GSP) / SLG 4-2 (GSOP), page 3.69		

Analog output

Series IGA - Proximity sensors

M12 / M18
Metal sleeve

0...10 V
4...20 mA



Design	M12x1	M18x1	M18x1
Dimensions			
Installation non flush (nf)			
Analog range [mm]	0...4 nf	0...5 nf	0...5 nf
Output			
ID-No.	P31128	P31040	P31129
Type	IGA 104 GI	IGA 005 GU	IGA 005 GI
Supply voltage [V]	18...27 DC	18...27 DC	18...27 DC
Current consumption max. [mA]	40	25	40
Voltage output max. [V]	-	11	-
Output current max. [mA]	23	-	23
Linearity deviation [%]	10	5	5
Load resistance RL [kΩ]	<0.4	>2	<0.4
Ambient temperature [°C]		-25...+70	
Temperature deviation [%]		10	
Protection [EN 60529]		IP 67	
Housing material		Br-Ni / PBT	
Connecting	2 m PVC-cable 3x0.34 mm²	2 m PVC-cable 3x0.5 mm²	
Output signal with approaching iron plate ST37			
Connection diagram			

Analog output

Series IGA / IDA - Proximity sensors

M30
Ø 80 mm

0...10 V
4...20 mA



Design	M30x1.5		Ø 80 mm	
Dimensions				
Installation non flush (nf)				
Analog range [mm]	0...10 nf	0...10 nf	0...30 nf	0...30 nf
Output				
ID-No.	0...10 V P31041	4...20 mA P31130	0...10 V P31043	4...20 mA P31131
Type	IGA 010 GU	IGA 010 GI	IDA 030 GU	IDA 030 GI
Supply voltage [V]	18...27 DC	18...27 DC	18...27 DC	18...27 DC
Current consumption max. [mA]	25	40	25	40
Voltage output max. [V]	11	-	11	-
Output current max. [mA]	-	23	-	23
Linearity deviation [%]	5		-25...+70	
Load resistance R_L [kΩ]	>2	<0.4	>2	<0.4
Ambient temperature [°C]	-25...+70		10	
Temperature deviation [%]	10		IP 67	
Protection [EN 60529]	IP 67		PBT	
Housing material	Br-Ni / PBT		PBT	
Connection	2 m PVC-cable 3x0.5 mm²			
Output signal with approaching iron plate ST37				
Connection diagram				

Analog • High temperature 160 °C

Series IGT - Proximity sensors







M18

4...20 mA

**For the connection to
amplifier IKM 120 GA**

Permanent temperature 160 °C

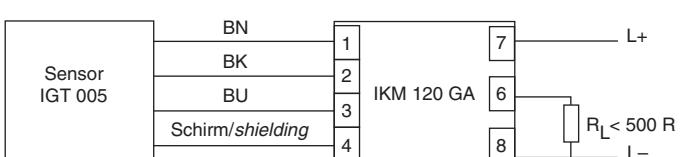

Design	IGT 005	IKM 120 GA
Dimensions		
Installation non flush (nf)		
Analog range [mm]	0...5 nf	-
ID-No.	P31143	P31144
Type	IGT 005	IKM 120 GA
Supply voltage [V]	-	24 DC ±20%
Current consumption [mA]	-	30
Current output [mA]	-	4...20 mA
Linearity [%]	6	0.5
Load R _L [Ω]	-	50...500
Ambient temperature [°C]	-25...+160	-20...+60
Temperature deviation [%]	10	2
Protection [EN 60529]	IP 67	IP 40
Housing material	AISI 316 Ti / PKS	PC
Connection	2 m PTFE 3x0.75 mm ²	terminal screws
Output signal with approaching iron plate ST37	 	
Connection diagramm		

Standard switches




Series IGM - Proximity switches



M8 / M12
Metal sleeve

DC 10...30 V

Euronorm



Design	M8x1	DC PNP • M12x1	DC PNP • M12x1		
Dimensions					
Installation flush (f) non flush (nf)					
Operating distance sn [mm]	1.5 f	2 f	4 nf		
Switching output PNP					
ID-No.	P31013	P31104	P31105	P31106	P31107
Type	IGM 1 GSP	IGM 102 GSP	IGM 104 GSP	IGMU 102 GSP	IGMU 104 GSP
Supply voltage [V]	10...30 DC	10...30 DC	10...30 DC	10...30 DC	10...30 DC
Switching current [mA]	200	200	200	200	200
Short circuit proof	•	•	•	•	•
Overcurrent release [mA]	250	250	250	250	250
Reverse protection	•	•	•	•	•
Voltage drop max. [V]	2	2	2	2	2
Residual current [mA]	-	-	-	-	-
Current consumption (not actuated) [mA]	<11	<5	<5	<5	<5
Switching frequency [Hz]	1000	800	400	800	400
Ambient temperature [°C]	-25...+70	-25...+70	-25...+70	-25...+70	-25...+70
EMC-class	A	A	A	A	A
Protection [EN 60529]	IP 67	IP 67	IP 67	IP 67	IP 67
LED display	•	•	•	•	•
Housing material	Stainless steel / PA	Br-Ni / PPO	Br-Ni / PPO	Br-Ni / PPO	Br-Ni / PPO
Connection	2 m PVC-cable 3x0.14 mm²	2 m PVC-cable 3x0.14 mm²	2 m PVC-cable 3x0.14 mm²	M12 connector	M12 connector



Accessories

connecting cable SLG 3-2, page 3.69

Standard switches

Serie IGM - Proximity switches





M18



Metal sleeve

DC 10...30 V

Euronorm



Design	DC PNP • M18x1		DC PNP • M18x1	
Dimensions				
Installation flush (f) non flush (nf)				
Operating distance sn [mm]	5 f	8 nf	5 f	8 nf
Switching output PNP				
ID-No.	P31110	P31111	P31112	P31113
Type	IGM 105 GSP	IGM 108 GSP	IGMU 105 GSP	IGMU 108 GSP
Supply voltage [V]	10...30 DC	10...30 DC	10...30 DC	10...30 DC
Switching current [mA]	200	200	200	200
Short circuit proof	•	•	•	•
Overshoot release [mA]	250	250	250	250
Reverse protection	•	•	•	•
Voltage drop max. [V]	1.5	1.5	1.5	1.5
Residual current [mA]	–	–	–	–
Current consumption (not actuated) [mA]	1	1	1	1
Switching frequency [Hz]	500	200	500	200
Ambient temperature [°C]	-25...+70	-25...+70	-25...+70	-25...+70
EMC-class	A	A	A	A
Protection [EN 60529]	IP 67	IP 67	IP 67	IP 67
LED display	•	•	•	•
Housing material	Br-Ni / PPO	Br-Ni / PPO	Br-Ni / PPO	Br-Ni / PPO
Connection	2 m PVC-cable 3x0.5 mm ²	2 m PVC-cable 3x0.5 mm ²	M12 connector	M12 connector



Accessories

connecting cable SLG 3-2, page 3.69

Standard switches

Series INK - Proximity switches

Smooth-bodied switch

Ø20 mm / Ø34 mm

DC 10...55 V

Sensors for AC voltage are available on request



Design	DC PNP		DC PNP programmable	
	Ø20 mm	Ø34 mm	Ø20 mm	Ø34 mm
Dimensions				
Installation non flush (nf)				
Operating distance sn [mm]	10 nf	20 nf	10 nf	20 nf
Switching output PNP				
ID-No.	P30159	P30166	P30158	P30165
Type	INK 010 GSP	INK 020 GSP	INKS 010 GPP	INKS 020 GPP
Supply voltage [V]	10...55 DC	10...55 DC	10...55 DC	10...55 DC
Switching current [mA]	400	400	400	400
Short circuit proof	•	•	•	•
Overcurrent release [mA]	450	450	450	450
Reverse protection	•	•	•	•
Voltage drop max. [V]	2	2	2	2
Residual current [mA]	-	-	-	-
Current consumption (not actuated) [mA]	2.5	2.5	2.5	2.5
Switching frequency [Hz]	1500	500	1500	500
Ambient temperature [°C]	-25...+75	-25...+75	-25...+75	-25...+75
EMC-class	A	A	A	A
Protection [EN 60529]	IP 67	IP 67	IP 67	IP 67
LED display	•	•	•	•
Housing material	PBT	PBT	PBT	PBT
Connection	2 m PVC-cable 3x0.5 mm ²	2 m PVC-cable 3x0.5 mm ²	2 m PVC-cable 3x0.5 mm ² (PG-plug connection)	2 m PVC-cable 3x0.5 mm ² (PG-plug connection)
PG-plug connection	<p>DC 1: BN 2: BK 3: BU Disconnect power supply NO NC before pulling off plug connector. Spannungsversorgung abschalten bevor Steckverbindung gezogen wird.</p>			
Accessories	mounting clamps Ø 20 mm (Z00100), Ø 34 mm (Z00102) are part of delivery			

Special functions • Surface sensor

Series IFE - Proximity switches

Wide detection range



DC 10...55 V

Sensitivity adjustable

Moisture-resistant

PG-plug IP 68

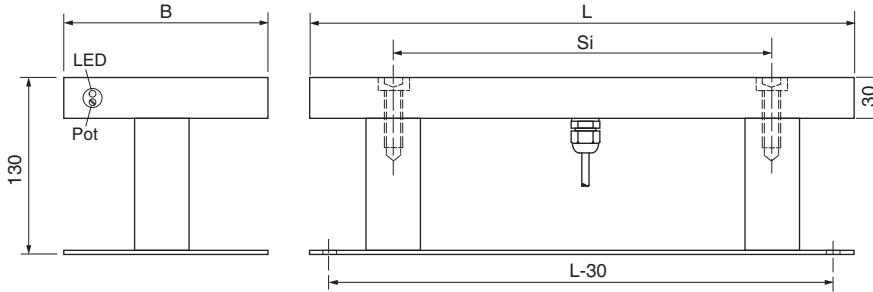

Design		DC PNP				
Dimensions						
Installation non flush (nf)						
Operating distance sn [mm]	100 nf 120	100 nf 150	130 nf 170	150 nf 200	180 nf 250	
Adjustable range max.						
Switching output PNP						
ID-No.	P31016	P31018	P31020	P31022	P31024	
Type	IFE 200/100 GSP	IFE 400/100 GSP	IFE 400/150 GSP	IFE 700/150 GSP	IFE 900/150 GSP	
Dimensions	L 200	B 100	Si 108	L 400	Si 280	Si 230
L 400	700	900				
B 150	150	150				
Si 190	190	182				
Supply voltage [V]	10...55 DC					
Switching current [mA]	< 400					
Short circuit protection	•					
Overcurrent release approx. [mA]	430					
Reverse protection	•					
Current consumption approx. [mA]	4					
Inverse current max. [μ A]	1					
Residual ripple max. [%]	15					
Voltage drop max. [V]	2					
Switching frequency [Hz]	10					
Hysteresis [%]	10					
Ambient temperature [$^{\circ}$ C]	-25...+75					
Correction factors	St 37: 1	AL: 0.4	VA 4: 0.65	Cu: 0.45	ZN: 0.5	MS: 0.6
EMC-class	A					
Protection [EN 60529]	IP 68					
Housing material	PVC / Aluminium					
Connection	PG-plug connection, 2 m PVC-cable 3x0.5 mm ²					
						
Notes	see page 3.06					

Special functions • Surface sensor

Series IFE - Proximity switches

Wide detection range



AC 20...250 V


Sensitivity adjustable

Moisture-resistant

PG-plug IP 68

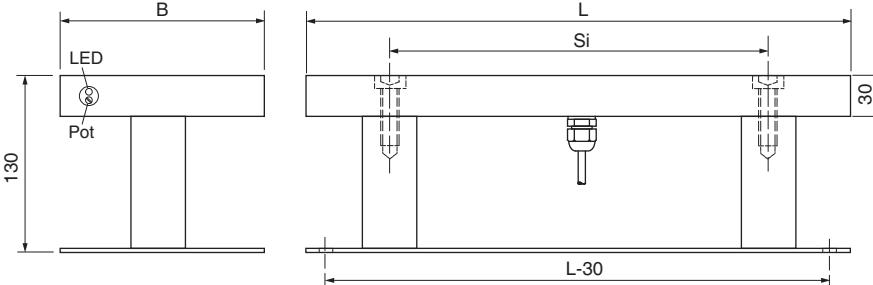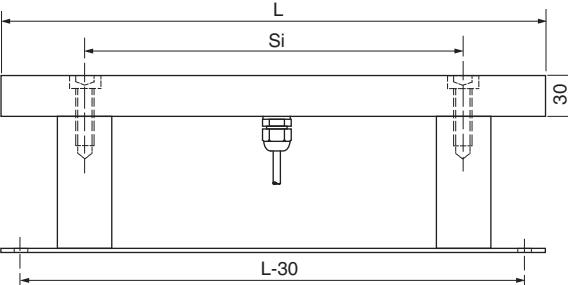

Design		AC				
Dimensions						
Installation non flush (nf)						
Operating distance sn [mm]	100 nf 120	100 nf 150	130 nf 170	150 nf 200	180 nf 250	
Adjustable range max.						
Switching output						
ID-No.	P31015	P31017	P31019	P31021	P31023	
Type	IFE 200/100 WS	IFE 400/100 WS	IFE 400/150 WS	IFE 700/150 WS	IFE 900/150 WS	
Dimensions	L 200	B 100	Si 108	L 400	B 100	Si 280
L 400	400	400	700	900		
B 150	150	150	150	150		
Si 230	230	190	190	182		
Supply voltage [V]	20...250 AC					
Switching current [mA]	< 400					
Surge current [mA]	< 3000 / 10 ms					
Overcurrent release approx. [mA]	-					
Current consumption approx. [mA]	2.5					
Inverse current approx. [mA]	2.5					
Minimum load current approx. [mA]	6					
Voltage drop max. [V]	6 eff.					
Switching frequency [Hz]	10					
Hysteresis [%]	10					
Ambient temperature [°C]	-25...+75					
Correktion factors	St 37: 1	AL: 0.4	VA 4: 0.65	Cu: 0.45	ZN: 0.5	MS: 0.6
EMC-class	A					
Protection [EN 60529]	IP 68					
Housing material	PVC					
Connection	PG-plug connection, 2 m PVC-cable 2x0.75 mm²					
Notes	see page 3.06					



Special functions • Offshore

Series IGMO - Proximity switches

M12 / M18


Stainless steel sleeve

DC 10...30 V

**High compressive strength
Longitudinal water blocked cable
Sea water proofed**



Design	DC PNP • M12x1	DC PNP • M18x1
Dimensions		
Installation flush (f)		
Operating distance sn [mm]	2 f	5 f
Switching output PNP		
ID-No.	P31223	P31224
Type	IGMO 02 GSP	IGMO 05 GSP
Supply voltage [V]	10...30 DC	
Switching current [mA]	200	
Short circuit proof	•	
Reverse protection	•	
Current consumption [mA]	4	
Switching frequency [Hz]	200	
Ambient temperature [°C]	-25...+70	
Compressive strength [bar]	30	
Protection [EN 60529]	IP 68	
Housing material	PTFE / AISI 316 Ti	
Sealing material	FKM	
Connection	1 m longitudinal water blocked cable	

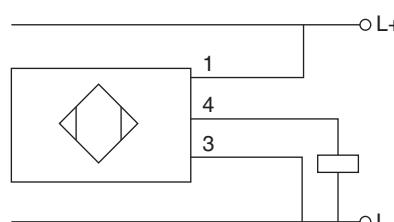

Special functions • Offshore

Series IGMO - Proximity switches

M18 / M30

**One piece stainless
steel housing**



DC 10...30 V


High compressive strength

Longitudinal water blocked cab

Sea water proofed

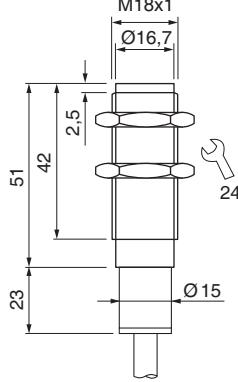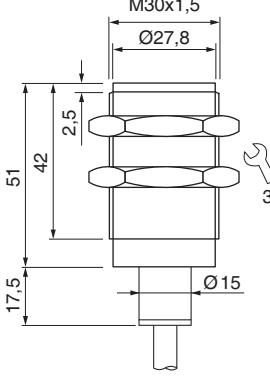

Design	DC PNP • M18x1	DC PNP • M30x1.5
Dimensions		
Installation flush (f)		
Operating distance s_n [mm]	5 b	10 b
Switching output PNP		
ID-No.	P31365	P31366
Type	IGVO 05 GSP	IGVO 10 GSP
Supply voltage [V]	10...30 DC	
Switching current [mA]	250	
Short circuit proof	•	
Reverse protection	•	
Current consumption max. [mA]	5	
Switching frequency [Hz]	180	150
Ambient temperature [°C]	-25...+70	
Compressive strength [bar]	30	
Protection [EN 60529]	IP 68 + IP 69K	
EMC-class	A	
Housing material	AISI 316 L	
Sealing material	FKM	
Connection	1 m longitudinal water blocked cable PLWDC-cable 3x0.5 mm ²	

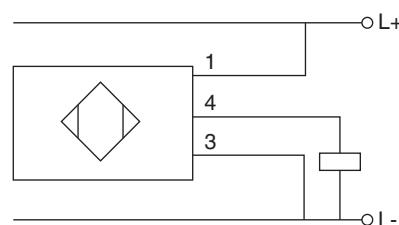

Special functions • Washing resistant

Series IDKW - Proximity switches

DC 10...30 V

110 °C Permanent temperature

Resistant to hot steam

Resistant to detergents

IP 68 + IP 69K



Design	DC PNP • Ø 80 mm	DC PNP • Ø 120 mm
Dimensions		
Installation non flush (nf)		
Operating distance sn [mm]	55 nf	90 nf
Switching output PNP		
ID-No.	P31214	P31177
Type	IDKW 080 GSP	IDKW 120 GSP
Supply voltage [V]	10...30 DC	
Switching current [mA]	300	
Hysteresis	<0.1 Sn	
Voltage drop max. [V]	2	
Current consumption [mA]	10	
Switching frequency [Hz]	30	
Ambient temperature [°C]	-20...+110	
Limiting temperature [°C]	120	
Temperature deviation [%]	≤10	
EMC-class	A	
Protection [EN 60529]	IP 68 + IP 69K	
Housing material	PP / AISI 316 Ti	
Sealing material	EPDM	
Connection	5 m FEP-cable 3x0.75 mm ² , shielded	
Switching current		

Special functions • Factor 1

Series IGB / IDB - Proximity switches

M30

Ø 80 mm / Ø 160 mm

DC 10...30 V

Correction factor 1
for all metals



Design	M30x1.5	M30x1.5	Ø 80 mm	Ø 160 mm
Dimensions				
Installation flush (f) non flush (nf) adjustable (a)				
Operating distance sn [mm]	10 f	20 nf	70 nf-a	150 nf-a
Switching output PNP				
ID-No.	P31135	P31136	P31141	P31142
Type	IGBS 010 GSP	IGBS 020 GSP	IDBS 080 GPP	IDBS 160 GPP
Supply voltage [V]	10...30 DC			
Switching current [mA]	200			
Short circuit proof	•			
Current consumption [mA]	25			
Reverse protection	•			
Voltage drop max. [V]	2			
Switching frequency [Hz]	300			
Ambient temperature [°C]	-25...+75			
EMC-class	A			
Protection [EN 60529]	IP 67			
Housing material	Br-Ni / PBT			
Connection	M12 connector			
PG-plug-system				
AC 1: BN 2: BU 3: BK	DC 1: BN 2: BU 3: BK			
Disconnect power supply, NO before pulling off plug connector. Spannungsversorgung abschalten bevor Steckverbindung gezogen wird.				

Metal face sensors • Speed sensor • -40...+150 °C

Series HGVH

Detection of ferromagnetic targets

One piece stainless steel housing

-40...+150 °C

IP 68 Water-proofed


IP 69K Resistant to high pressure cleaning



Design

DC PNP • M18x1

Dimensions

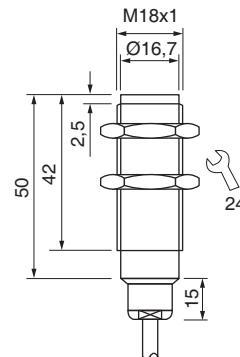

Operating distance s_n [mm]

3

Switching output PNP



ID-No.

P31364

Type

HGVH 03 GSP

Supply voltage [V]

10...30 DC

Switching current max. [mA]

100

Short circuit proof

•

Reverse protection

•

Voltage drop max. [V]

1.5

Current consumption max. [mA]

20

Switching frequency [Hz]

6000

Ambient temperature [°C]

-40...+150

EMC-class

A

Protection [EN 60529]


IP 68 + IP 69K

Housing material

AISI 316 L

Connection


2 m FEP-cable 3x0.34 mm²

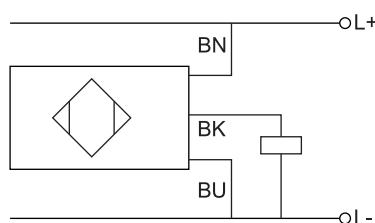

Inductive Sensors



Notes

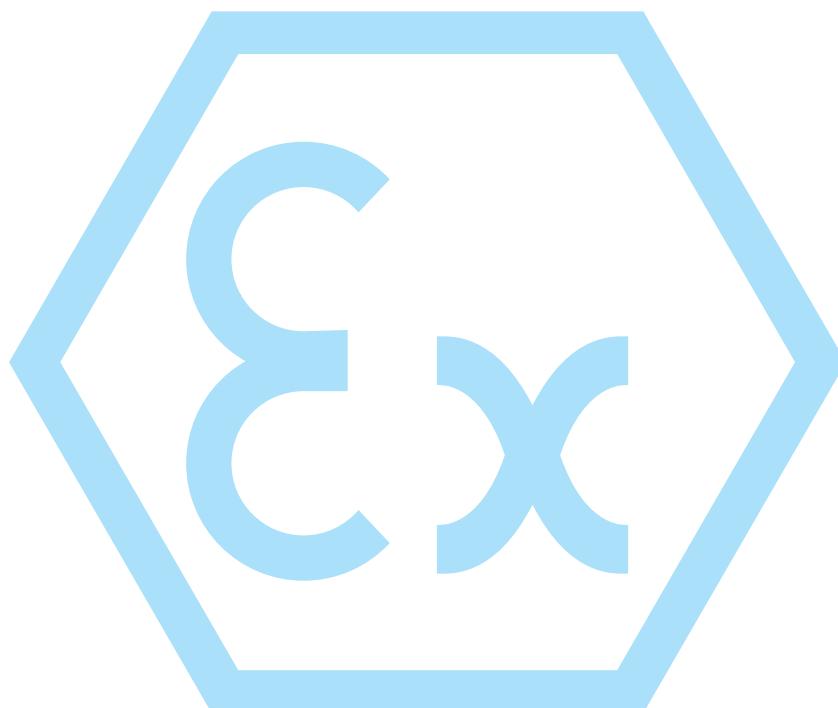

Probes
Compact models
Amplifiers

Dust / Gas - Compact model • Zone 0/20

Series IGEX20a - Proximity switches

Gas-Ex Category 1

Ex ma IIC T6 Ga

Dust-Ex Category 1

Ex ma IIIC T90°C Da



Design	DC PNP • M12x1	DC PNP • M18x1	DC PNP • M30x1.5	
Dimensions				
Installation flush (f) non flush (nf)	LED 52 44 M12x1	LED 31 17 1.5 M12x1 18.5 Ø 18	LED 54 44 M18x1 34 2.5 20.5 Ø 23 M18x1 24 6	LED 54 44 M30x1.5 34 3 23 Ø 36 M30x1.5 36 8
Operating distance [mm]	2 f	4 nf	5 f	
Switching output PNP				
ID-No.	P31379	P31380	P31381	
Type	IGEX20a 02 GSP	IGEX20a 04 GSP	IGEX20a 05 GSP	
Ex area of use	Gas: Zone 0/1 / Dust: Zone 20/21			
Certificate No.	EPS 17 ATEX 1 117 X			
Ex marking	Gas: Ex ma IIC T6 Ga	Ex ma IIC T6 Ga		
	Dust: Ex ma IIIC T90°C Da	Ex ma IIIC T90°C Da		
Ambient temperature [°C]	Gas Zone 0: T6: -20 ≤ Ta ≤ +60 * T5: -20 ≤ Ta ≤ +60 * T4: -20 ≤ Ta ≤ +60 * T3: -20 ≤ Ta ≤ +60 * Dust Zone 20: -20 ≤ Ta ≤ +60 *	Gas Zone 1: T6: -20 ≤ Ta ≤ +60 * T5: -20 ≤ Ta ≤ +60 * T4: -20 ≤ Ta ≤ +60 * T3: -20 ≤ Ta ≤ +60 *	Dust Zone 21: -20 ≤ Ta ≤ +60 *	
* +55 for type M12x1				
Supply voltage [V]	24 DC ±10%			
Switching current [mA]	50			
Rated voltage [V]	27 DC			
Rated current [mA]	50			
LED display	red	yellow	yellow	
Impact protection cap	•	•	•	
Housing material	AISI 316 Ti / PPSU / LCP / POM			
Protection [EN 60529]	IP 67			
Connection	2 m PUR-cable 3x0.34 mm²			
	explosionsgefährdeter Bereich (Gas oder Staub) hazardous area (gas or dust)			
	BN — L+ BK — S BU — L-			
	nicht explosionsgefährdet Bereich non hazardous area			
Note	proximity switches with cable length > 2 m are available on request			

Inductive Sensors



Dust / Gas - Compact model • Zone 0/20

Series IGEX20Pa - Proximity switches

Gas-Ex Category 1
Ex ma IIC T6 Ga

Dust-Ex Category 1
Ex ma IIIC T90°C Da



Ambient temperature up to -60 °C

Design	DC PNP • M12x1	DC PNP • M18x1	DC PNP • M30x1.5	
Dimensions				
Installation flush (f) non flush (nf)				
Operating distance [mm]	2 f	4 nf	5 f	
Switching output PNP				
ID-No.	P31385	P31386	P31387	
Type	IGEX20Pa 02 GSP	IGEX20Pa 04 GSP	IGEX20Pa 05 GSP	
Ex area of use	Gas: Zone 0/1 / Staub: Zone 20/21			
Certificate No.	EPS 17 ATEX 1 117 X			
Ex marking	Gas: Ex ma IIC T6 Ga	IECEx EPS 17.0059X		
	Dust: Ex ma IIIC T90°C Da	Ex ma IIIC T90°C Da		
Ambient temperature [°C]	Gas Zone 0: T6: -20 ≤ Ta ≤ +60 * T5: -20 ≤ Ta ≤ +60 * T4: -20 ≤ Ta ≤ +60 * T3: -20 ≤ Ta ≤ +60 *	Gas Zone 1: T6: -60 ≤ Ta ≤ +60 * T5: -60 ≤ Ta ≤ +60 * T4: -60 ≤ Ta ≤ +60 * T3: -60 ≤ Ta ≤ +60 *	Dust Zone 20: -20 ≤ Ta ≤ +60 *	Dust Zone 21: -60 ≤ Ta ≤ +60 *
* +55 for type M12x1				
Supply voltage [V]	24 DC ±10%			
Switching current [mA]	50			
Rated voltage [V]	27 DC			
Rated current [mA]	50			
LED display	yellow	yellow	yellow	
Impact protection cap	•	•	•	
Housing material	AISI 316 Ti / PTFE / PVDF / POM			
Protection [EN 60529]	IP 68 (3 bar)			
Connection	2 m FEP-cable 3x0.34 mm²			
	explosionsgefährdet Bereich (Gas oder Staub) hazardous area (gas or dust)			
	BN — L+ BK — S BU — L-			
	nicht explosionsgefährdet Bereich non hazardous area			
Note	proximity switches with cable length > 2 m are available on request			

Series IGEXUa - Proximity switches

Gas-Ex Category 1

Ex ia IIC T6 Ga

Dust-Ex Category 1

Ex ia IIIC T80°C Da



Design	M12x1	M18x1	M30x1.5			
Dimensions						
Installation flush (f) non flush (nf)	65	42 17	54 24 14	54 44 14		
Operating distance [mm]	2 f	4 nf	5 f	8 nf	10 f	15 nf
ID-No.	P31412	P31413	P31414	P31415	P31416	P31417
Type	IGEXUa 02	IGEXUa 04	IGEXUa 05	IGEXUa 08	IGEXUa 10	IGEXUa 15
Ex area of use	Gas: Zone 0/1 / Dust: Zone 20/21					
Certification No.	EPS 17 ATEX 1 173 X					
Ex marking	Gas: Ex ia IIC T6 Ga Dust: Ex ia IIIC T80°C Da					
Ambient temperature [°C] and medium temperature	Gas Zone 0: T6: -20 ≤ Ta ≤ +60 T5: -20 ≤ Ta ≤ +60 T4: -20 ≤ Ta ≤ +60 T3: -20 ≤ Ta ≤ +60 Dust Zone 20: -25 ≤ Ta ≤ +75	Gas Zone 1: T6: -25 ≤ Ta ≤ +75 T5: -25 ≤ Ta ≤ +75 T4: -25 ≤ Ta ≤ +75 T3: -25 ≤ Ta ≤ +75 Dust Zone 21: -25 ≤ Ta ≤ +75	T6: -25 ≤ Ta ≤ +75 T5: -25 ≤ Ta ≤ +75 T4: -25 ≤ Ta ≤ +75 T3: -25 ≤ Ta ≤ +75 Dust Zone 21: -25 ≤ Ta ≤ +75			
Maximum values	Ui = 12.6 V / Ii = 15.9 mA / Pi = 50 mW / Ci = 66.2 nF / Li = 1.2 mH					
Housing material	Br-Ni / PA					
Protection [EN 60529]	IP 67					
Connection	M12 connector					
For the connection to amplifiers IKMb 122 Ex..., page 3.67	<p>explosionsgefährdeter Bereich hazardous area</p> <p>nicht explosionsgefährdeter Bereich non hazardous area</p> <p>Betriebsspannung / Supply voltage</p> <p>Auswertegerät Amplifier</p> <p>Relais Ausgang / Relay output</p>					

Inductive Sensors



Dust / Gas - Intrinsically safe • Zone 0/20

Series IGEXa - Proximity switches

Gas-Ex Category 1
Ex ia IIC T6 Ga

Dust-Ex Category 1
Ex ia IIIC T80°C Da



Design	M12x1	M18x1	M30x1.5
Dimensions			
Installation flush (f) non flush (nf)			
Operating distance [mm]	2 f	4 nf	5 f
ID-No.	P31445	P31446	P31447
Type	IGEXa 02	IGEXa 04	IGEXa 05
Ex area of use	Gas: Zone 0/1 / Dust: Zone 20/21		
Certification No.	EPS 17 ATEX 1 173 X		
Ex marking	Gas: Ex ia IIC T6 Ga Dust: Ex ia IIIC T80°C Da		
Ambient temperature [°C] and medium temperature	Gas Zone 0: T6: -20 ≤ Ta ≤ +60 T5: -20 ≤ Ta ≤ +60 T4: -20 ≤ Ta ≤ +60 T3: -20 ≤ Ta ≤ +60 Dust Zone 20: -25 ≤ Ta ≤ +75	Gas Zone 1: T6: -25 ≤ Ta ≤ +75 T5: -25 ≤ Ta ≤ +75 T4: -25 ≤ Ta ≤ +75 T3: -25 ≤ Ta ≤ +75 Dust Zone 21: -25 ≤ Ta ≤ +75	T6: -25 ≤ Ta ≤ +75 T5: -25 ≤ Ta ≤ +75 T4: -25 ≤ Ta ≤ +75 T3: -25 ≤ Ta ≤ +75 -25 ≤ Ta ≤ +75
Maximum values	Ui = 12.6 V / Ii = 15.9 mA / Pi = 50 mW / Ci = 66.2 nF / Li = 1.2 mH		
Housing material	Br-Ni / PA		
Protection [EN 60529]	IP 67		
Connection	2 m PVC-cable 2x0.5 m²		
For the connection to amplifiers IKMb 122 Ex..., page 3.67	<p>explosionsgefährdet Bereich hazardous area</p> <p>nicht explosionsgefährdet Bereich non hazardous area</p> <p>Betriebsspannung / Supply voltage</p> <p>Relais Ausgang / Relay output</p>		
Note	proximity switches with cable length > 2 m are available on request		

Inductive Sensors



Dust / Gas - Intrinsically safe • Zone 0/20

Series IGEXHa - Proximity switches

Gas-Ex Category 1
Ex ia IIC T6 Ga

Dust-Ex Category 1
Ex ia IIIC T145°C Da

High temperature sensors +140 °C
IP 69 Resistant to high pressure cleaning



Design	M12x1	M18x1	M30x1.5
Dimensions			
Installation flush (f) non flush (nf)			
Operating distance [mm]	2 f	4 nf	5 f
ID-No.	P31400	P31401	P31402
Type	IGEXHa 02	IGEXHa 04	IGEXHa 05
Ex area of use	Gas: Zone 0/1 / Dust: Zone 20/21		
Certificate No.	EPS 17 ATEX 1 173 X		
Ex marking	Gas: Ex ia IIC T6 Ga	Gas: Ex ia IIC T6 Ga	Dust: Ex ia IIIC T145°C Da
Ambient temperature [°C] and medium temperature	Gas Zone 0: T6: -20 ≤ Ta ≤ +60 T5: -20 ≤ Ta ≤ +60 T4: -20 ≤ Ta ≤ +60 T3: -20 ≤ Ta ≤ +60 Dust Zone 20: -25 ≤ Ta ≤ +140	Gas Zone 1: T6: -25 ≤ Ta ≤ +75 T5: -25 ≤ Ta ≤ +90 T4: -25 ≤ Ta ≤ +125 T3: -25 ≤ Ta ≤ +140	Dust Zone 21: -25 ≤ Ta ≤ +140
Maximum values	Ui = 12.6 V / li = 15.9 mA / Pi = 50 mW / Ci = 66.2 nF / Li = 1.2 mH		
Housing material	AISI 316 Ti / PEEK		
Protection [EN 60529]	IP 68 (3 bar), IP 69		
Connection	2 m FEP-cable 2x0.34 mm²		
Sensors for the connection to amplifiers IKMb 122 Ex..., page 3.67	<p>explosionsgefährdet Bereich hazardous area</p> <p>nicht explosionsgefährdet Bereich non hazardous area</p> <p>Betriebsspannung / Supply voltage</p> <p>Auswertegerät Amplifier</p> <p>Relais Ausgang / Relay output</p>		
Note	proximity switches with cable length > 2 m are available on request		

Inductive Sensors



Dust / Gas - Intrinsically safe • Zone 0/20

Series IGEXPa - Proximity switches

Gas-Ex Category 1
Ex ia IIC T6 Ga

Dust-Ex Category 1
Ex ia IIIC T65°C Da



POLAR-Sensors -60 °C
IP 69 Resistant to high pressure cleaning

Design	M12x1	M18x1	M30x1.5
Dimensions			
Installation flush (f) non flush (nf)			
Operating distance [mm]	2 f	4 nf	5 f
ID-No.	P31406	P31407	P31408
Type	IGEXPa 02	IGEXPa 04	IGEXPa 05
Ex area of use	Gas: Zone 0/1 / Dust: Zone 20/21		
Certificate No.	EPS 17 ATEX 1 173 X		
Ex marking	Gas: II 1G Ex ia IIC T6 Ga Dust: II 1D Ex ia IIIC T65°C Da		
Ambient temperature [°C] and medium temperature	Gas Zone 0: T6: -20 ≤ Ta ≤ +60 T5: -20 ≤ Ta ≤ +60 T4: -20 ≤ Ta ≤ +60 T3: -20 ≤ Ta ≤ +60 Dust Zone 20: -60 ≤ Ta ≤ +60	Gas Zone 1: T6: -60 ≤ Ta ≤ +60 T5: -60 ≤ Ta ≤ +60 T4: -60 ≤ Ta ≤ +60 T3: -60 ≤ Ta ≤ +60 Dust Zone 21: -60 ≤ Ta ≤ +60	T6: -60 ≤ Ta ≤ +60 T5: -60 ≤ Ta ≤ +60 T4: -60 ≤ Ta ≤ +60 T3: -60 ≤ Ta ≤ +60 -60 ≤ Ta ≤ +60
Maximum values	Ui = 12.6 V / Ii = 15.9 mA / Pi = 50 mW / Ci = 66.2 nF / Li = 1.2 mH		
Housing material	AISI 316 Ti / PTFE / PVDF		
Protection [EN 60529]	IP 68 (3 bar), IP 69		
Connection	2 m FEP-cable 2x0.34 mm²		
Sensors for the connection to amplifiers IKMb 122 Ex..., page 3.67	<p>explosionsgefährdet Bereich hazardous area</p> <p>nicht explosionsgefährdet Bereich non hazardous area</p> <p>Auswertegerät Amplifier</p> <p>Betriebsspannung / Supply voltage</p> <p>Relais Ausgang / Relay output</p>		
Note	proximity switches with cable length > 2 m are available on request		

Dust / Gas - Compact model • Zone 2/22


Series IGEX22c - Proximity switches

Gas-Ex Category 3
Ex ec IIC T6 Gc

Dust-Ex Category 3
Ex tc IIIC T70°C Dc



Design	DC PNP • M12x1	DC PNP • M18x1	DC PNP • M30x1.5	
Dimensions				
Installation flush (f) non flush (nf)	LED 52 44 M12x1	LED 31 17 1.5 M12x1 18.5	LED 54 44 M18x1	LED 34 24 2.5 M18x1 20.5 6
Operating distance [mm]	2 f	4 nf	5 f	
Switching output PNP				
ID-No.	P31391	P31392	P31393	
Type	IGEX22c 02 GSP	IGEX22c 04 GSP	IGEX22c 05 GSP	
Ex area of use	Gas: Zone 2 / Dust: Zone 22			
Certificate No.	IECEx EPS 17.0042X			
Conformity No.	EGE 18.0020 X			
Ex marking	Gas: II 3G Ex ec IIC T6 Gc Dust: II 3D Ex tc IIIC T70°C Dc	Gas: Ex ec IIC T6 Gc Dust: Ex tc IIIC T70°C Dc		
Ambient temperature [°C] and medium temperature	Gas Zone 2: T6: -20 ≤ Ta ≤ +60 T5: -20 ≤ Ta ≤ +60 T4: -20 ≤ Ta ≤ +60 T3: -20 ≤ Ta ≤ +60 -20 ≤ Ta ≤ +60 Dust Zone 22:			
Rated voltage [V]	30 DC			
Supply voltage [V]	24 DC ±10%			
Switching current [mA]	100			
Switching frequency [Hz]	300			
LED display	red	red	yellow	
Impact protection cap	•		•	
Housing material	AISI 316 Ti / PPSU / LCP / POM			
Protection [EN 60529]	IP 67			
Connection	2 m PUR-cable 3x0.34 mm²			
Note	proximity switches with cable length > 2 m are available on request			



Dust / Gas - Compact model • Zone 2/22

Series IGVEX22c - Proximity switches

Gas-Ex Category 3

Ex ec IIC T6 Gc


Dust-Ex Category 3

Ex tc IIIC T75°C Dc

One piece stainless steel housing



Design	DC PNP • M12x1	DC PNP • M18x1	DC PNP • M30x1.5
Dimensions			
Operating distance [mm]	2	5	10
Switching output PNP			
ID-No.	P31397	P31398	P31399
Type	IGVEX22c 02 GSP	IGVEX22c 05 GSP	IGVEX22c 10 GSP
Ex area of use	Gas: Zone 2 / Dust: Zone 22		
Certificate No.	IECEx EPS 17.0042X		
Conformity No.	EGE 18.0020 X		
Ex marking	Gas: Ex ec IIC T6 Gc Dust: Ex tc IIIC T75°C Dc	Gas: Ex ec IIC T6 Gc Dust: Ex tc IIIC T75°C Dc	Gas: Ex ec IIC T6 Gc Dust: Ex tc IIIC T75°C Dc
Ambient temperature [°C] and medium temperature	<p>Gas Zone 2: T6: -5 ≤ Ta ≤ +60 T5: -5 ≤ Ta ≤ +60 T4: -5 ≤ Ta ≤ +60 T3: -5 ≤ Ta ≤ +60</p> <p>Dust Zone 22: -5 ≤ Ta ≤ +60</p>	<p>Gas Zone 2: T6: -10 ≤ Ta ≤ +60 T5: -10 ≤ Ta ≤ +60 T4: -10 ≤ Ta ≤ +60 T3: -10 ≤ Ta ≤ +60</p> <p>Dust Zone 22: -10 ≤ Ta ≤ +60</p>	<p>Gas Zone 2: T6: -20 ≤ Ta ≤ +60 T5: -20 ≤ Ta ≤ +60 T4: -20 ≤ Ta ≤ +60 T3: -20 ≤ Ta ≤ +60</p> <p>Dust Zone 22: -20 ≤ Ta ≤ +60</p>
Rated voltage [V]	30 DC		
Supply voltage [V]	24 DC ±10%		
Switching current [mA]	100		
Switching frequency [Hz]	180		
LED display	red	yellow	yellow
Housing material	AISI 316 L / PPSU	AISI 316 L / PA	AISI 316 L / PA
Protection [EN 60529]	IP 67		
Connection	2 m PUR-cable 3x0.34 mm²		
Note	proximity switches with cable length > 2 m are available on request		



Inductive Sensors



Dust / Gas - Compact model • Zone 2/22

Series IGVEX22c - Proximity switches


Gas-Ex Category 3
Ex ec IIC T6 Gc

Dust-Ex Category 3
Ex tc IIIC T75°C Dc



One piece stainless steel housing
Silicone cable

Design	DC PNP • M12x1	DC PNP • M18x1	DC PNP • M30x1.5
Dimensions			
Operating distance [mm]	2	5	10
Switching output PNP			
ID-No.	P31421	P31422	P31423
Type	IGVEX22c 02 GSP-K	IGVEX22c 05 GSP-K	IGVEX22c 10 GSP-K
Ex area of use	Gas: Zone 2 / Dust: Zone 22		
Certificate No.	IECEx EPS 17.0042X		
Conformity No.	EGE 18.0020 X		
Ex marking	Gas: II 3G Ex ec IIC T6 Gc Dust: II 3D Ex tc IIIC T75°C Dc	Gas: Ex ec IIC T6 Gc Dust: Ex tc IIIC T75°C Dc	
Ambient temperature [°C] and medium temperature	Gas Zone 2: T6: -20 ≤ Ta ≤ +60 T5: -20 ≤ Ta ≤ +60 T4: -20 ≤ Ta ≤ +60 T3: -20 ≤ Ta ≤ +60 -20 ≤ Ta ≤ +60 Dust Zone 22:		
Rated voltage [V]	30 DC		
Supply voltage [V]	24 DC ±10%		
Switching current [mA]	100		
Switching frequency [Hz]	180		
LED display	red	yellow	yellow
Housing material	AISI 316 L / PPSU	AISI 316 L / PA	AISI 316 L / PA
Protection [EN 60529]	IP 67		
Connection	2 m silicone-cable 3x0.34 mm ²		
Note	proximity switches with cable length > 2 m are available on request		



Ex - Amplifiers

Series IKMb 122 Ex

Gas [Ex ia Ga] IIC

Dust [Ex ia Da] IIIC

Cable break and short circuit monitoring


Connection to intrinsically safe 2-lead sensors

Output function programmable




Design

Dimensions

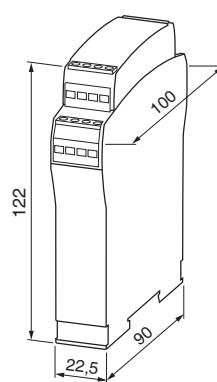

ID-No.	P31418	P31420	P31419
Type	IKMb 122 Ex-24	IKMb 122 Ex-115	IKMb 122 Ex-230
Output	relay / change over		
Ex area of use			
Certificate No.	outside of the hazardous areas (gas or dust)		
Ex marking	Gas: II (1)G [Ex ia Ga] IIC Dust: II (1)D [Ex ia Da] IIIC	Gas: [Ex ia Ga] IIC Dust: [Ex ia Da] IIIC	IECEx EPS 17.0047
Ambient temperature [°C]	$-20 \leq Ta \leq +60$		
Maximum values	$U_o = 9.6 \text{ V} / I_o = 10.1 \text{ mA} / P_o = 24.2 \text{ mW} / C_o = 0.84 \mu\text{F} / L_o = 5.00 \text{ mH}$		
Rated voltage [V]	30 DC	127 AC	253 AC
Supply voltage [V]	24 DC $\pm 10\%$	115 AC $\pm 10\%$	230 AC $\pm 10\%$
Switching voltage max. [V]	250 AC / 60 DC / 24 DC		
Switching current max. [A]	4 AC / 0,8 DC / 4 DC		
Switching power	$\cos \varphi > 0,7 / L/R \leq 200 \text{ ms} / L/R \leq 200 \text{ ms}$		
LED display	power: green / switching output: yellow / cable break: red		
Protection [EN 60529]	IP 20		
Connection	terminal screws		

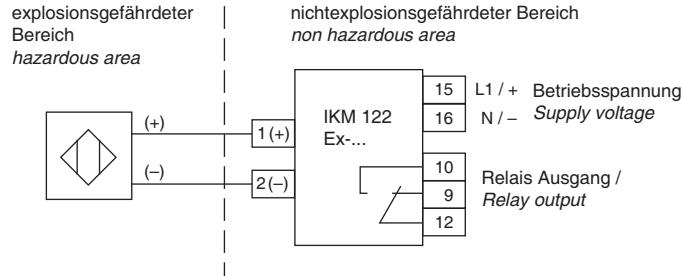

- Amplifiers

Series IKMb 123 Ex

Gas [Ex ia Ga] IIC

Dust [Ex ia Da] IIIC

Cable break and
short circuit monitoring

Connection to intrinsically safe
3-lead sensors


Output function programmable




Design

IKMb 123 Ex...

Dimensions

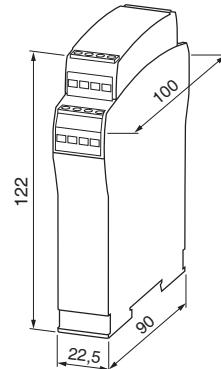

ID-No.	P31451	P31453	P31452
Type Output	IKMb 123 Ex-24	IKMb 123 Ex-115	IKMb 123 Ex-230
relay / change over			
Ex area of use			
outside of the hazardous areas (gas or dust)			
Certificate No.			
EPS 17 ATEX 1 091 IECEx EPS 17.0047			
Ex marking			
Gas: $\text{Ex II (1)G [Ex ia Ga] IIC}$ Gas: [Ex ia Ga] IIC			
Dust: $\text{Ex II (1)D [Ex ia Da] IIIC}$ Dust: [Ex ia Da] IIIC			
Ambient temperature [°C]	$-20 \leq T_a \leq +60$		
Maximum values	$U_o = 9.6 \text{ V} / I_o = 50.5 \text{ mA} / P_o = 121.3 \text{ mW} / C_o = 0.68 \mu\text{F} / L_o = 5.00 \text{ mH}$		
Rated voltage [V]	30 DC	127 AC	253 AC
Supply voltage [V]	24 DC $\pm 10\%$	115 AC $\pm 10\%$	230 AC $\pm 10\%$
Switching voltage max. [V]	250 AC / 60 DC / 24 DC		
Switching current max. [A]	4 AC / 0,8 DC / 4 DC		
Switching power	$\cos \varphi > 0,7 / L/R \leq 200 \text{ ms} / L/R \leq 200 \text{ ms}$		
LED display	power: green / switching output: yellow / cable break: red		
Protection	IP 20		
Connection	terminal screws		

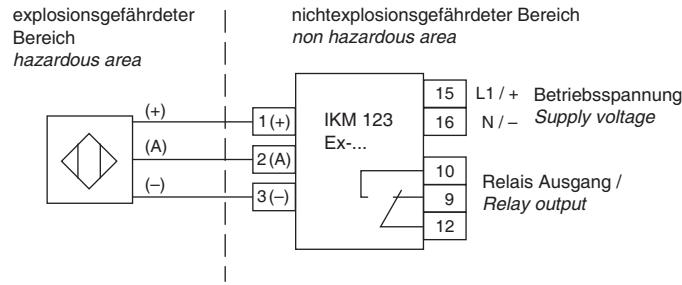


Accessories • M12 connector

System SL


Finished cable plug housing

Self locking screw plug

Protection IP 67




Cable plug housing



SLG...


SLW...

Pin-assignment

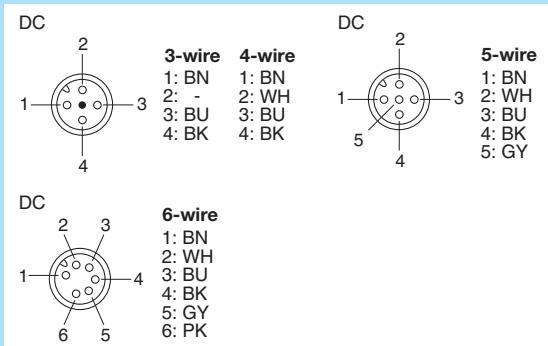

DC

Plug-lock



PL-M12

TYPE	ID-NO.	DESIGN
SLG 3-2	Z01076	Cable plug housing straight, 2 m cable 3x0.34 mm ² max. 250 V / 4 A
SLG 3-5	Z01077	Cable plug housing straight, 5 m cable 3x0.34 mm ² max. 250 V / 4 A
SLW 3-2	Z01078	Cable plug housing angular, 2 m cable 3x0.34 mm ² max. 250 V / 4 A
SLW 3-5	Z01079	Cable plug housing angular, 5 m cable 3x0.34 mm ² max. 250 V / 4 A
SLW 3-2-LED	Z00052	Cable plug housing angular, 2 m cable 3x0.34 mm ² max. 250 V / 4 A PNP with LED
SLG 4-2	Z00445	Cable plug housing straight, 2 m cable 4x0.25 mm ² max. 250 V / 4 A
SLG 4-5	Z00449	Cable plug housing straight, 5 m cable 4x0.25 mm ² max. 250 V / 4 A
SLW 4-2	Z00446	Cable plug housing angular, 2 m cable 4x0.25 mm ² max. 250 V / 4 A
SLW 4-5	Z00450	Cable plug housing angular, 5 m cable 4x0.25 mm ² max. 250 V / 4 A
SLW 4-2-LED	Z01157	Cable plug housing angular, 2 m cable 4x0.25 mm ² max. 250 V / 4 A PNP with LED
SLG 5-2	Z01150	Cable plug housing straight, 2 m cable 5x0.34 mm ² max. 60 V / 2 A
SLW 5-2	Z01151	Cable plug housing angular, 2 m cable 5x0.34 mm ² max. 60 V / 2 A
SLG 6-2	Z01197	Cable plug housing straight, 2 m cable 6x0.25 mm ² max. 36 V / 2 A
SLW 6-2	Z01198	Cable plug housing angular, 2 m cable 6x0.25 mm ² max. 36 V / 2 A
PL-M12	Z01182	Plug-lock for sensors in Ex areas

DATA

Thread	M12x1	Contact resistance	$\leq 5 \text{ m}\Omega$
Material	PVC	Insulation resistance	$>10^9$
Protection	IP 67	Testing voltage	2.0 KV eff. / 5 and 6 pol. 1.5 KV eff.
Temperature range	-25...+80 °C		


Note

Sensors with NC output are connected to 4 pole cable plug housings. In this case, the break output is connected to the white lead (connection 2).

Accessories • PG plug system

PG plug system

PG plug type connection with PVC-cable Protection IP 68

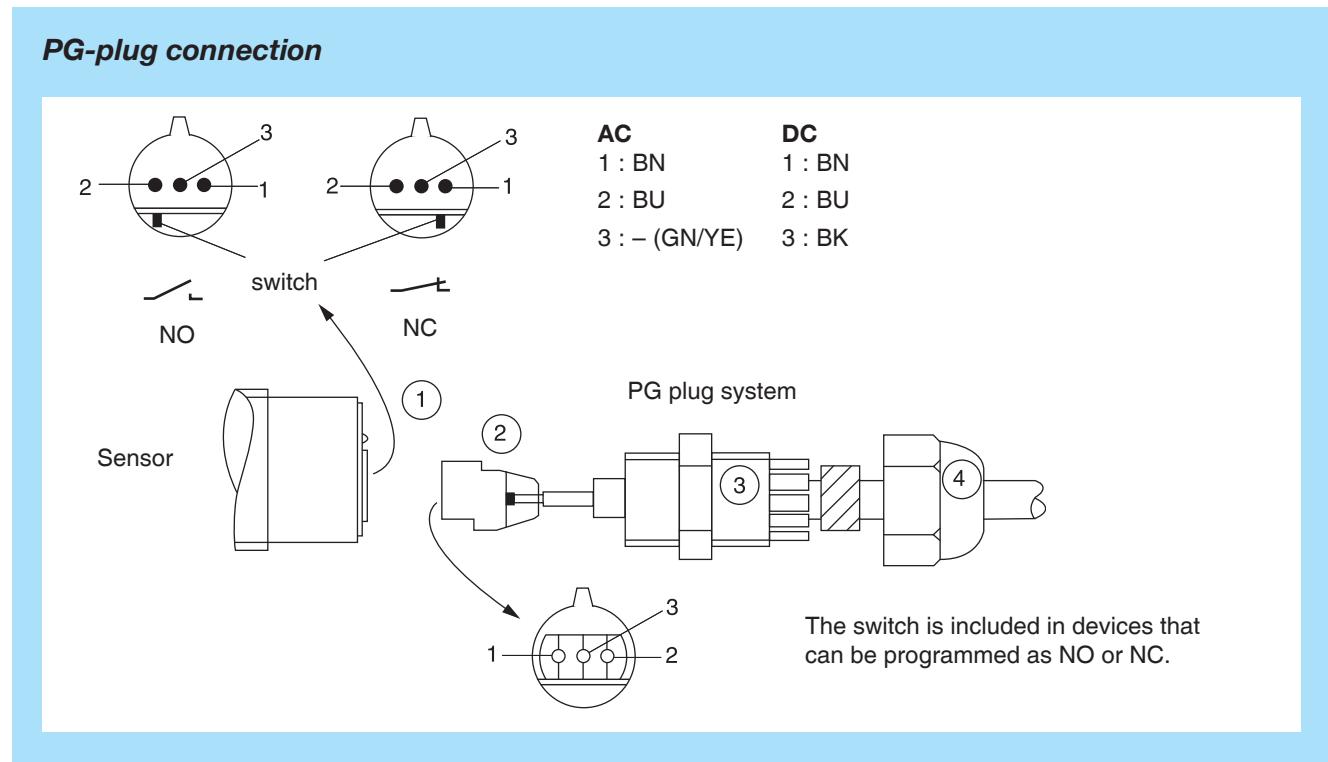

Mounting of PG plug system

Connect the cable to the EGE-plug (2) and put it into the plug-housing (1) until it is at the stop. Make sure that the "nose" of the plug fits exactly into the housing. If this is done in the right way, the plug is hidden in the plug-housing.

Screw part (3) into the plug-housing (1) and fix it rightly with a spanner. After about 2 hours tighten it again with the spanner.

Now fit the nut (4) by hand and afterwards with a spanner. Do not apply too much force. For a good sealing there should be stet 2 mm between nut (4) and part (3).

TYPE	ID-NO.	DESIGN		
PG 2-2	Z00025	PG-plug connection,	2 m PVC-cable 2x0.75 mm ²	AC
PG 2-3	Z00026	PG-plug connection,	3 m PVC-cable 2x0.75 mm ²	AC
PG 2-5	Z00027	PG-plug connection,	5 m PVC-cable 2x0.75 mm ²	AC
PG 2-10	Z00028	PG-plug connection,	10 m PVC-cable 2x0.75 mm ²	AC
PG 2-20	Z00029	PG-plug connection,	20 m PVC-cable 2x0.75 mm ²	AC
PG 3-2	Z00020	PG-plug connection,	2 m PVC-cable 3x0.5 mm ²	DC
PG 3-3	Z00021	PG-plug connection,	3 m PVC-cable 3x0.5 mm ²	DC
PG 3-5	Z00022	PG-plug connection,	5 m PVC-cable 3x0.5 mm ²	DC
PG 3-10	Z00023	PG-plug connection,	10 m PVC-cable 3x0.5 mm ²	DC
PG 3-20	Z00024	PG-plug connection,	20 m PVC-cable 3x0.5 mm ²	DC

Note

The power supply must be disconnected before the plug will be installed or removed.

Code: BK = black BN = brown BU = blue GN = green YE = yellow GY = grey PK = pink WH = white

Accessories • Assembly parts

Lock nuts, brass-nickel - plated

ID-NO.	Z00106	Z00107	Z00114	Z00109	Z00110
Nut thickness [mm]	4	4	4	5	5
Thread	M12x1	M18x1	M22x1	M30x1.5	M38x1.5
Spanner size	17	24	27	36	50

Lock nuts, special steel

ID-NO.	Z01098	Z00112	Z00113	Z00115
Nut thickness [mm]	4	4	4	5
Thread	M8x1	M12x1	M18x1	M30x1.5
Spanner size	13	17	24	36




Lock nuts, plastics

ID-NO.	Z00180	Z00120	Z00117	Z00118	Z00119	Z01092	Z01052
Nut thickness [mm]	6	8	4	5	5,5	8	8
Thread	M14x1	M30x1.5	M12x1	M18x1	M30x1.5	G3/4	G1
Spanner size	22	41	17	24	36	41	50
Material	PTFE	PTFE	PPE	PPE	PPE	PTFE	PTFE

Central screw, polyamide

Z00104	M12, length 70 mm, hexagon socket 10 mm, material PA
Z00105	M16, length 90 mm, hexagon socket 14 mm, material PA

MOUNTING CLAMPS

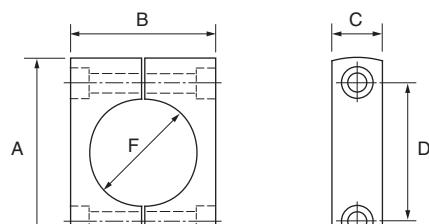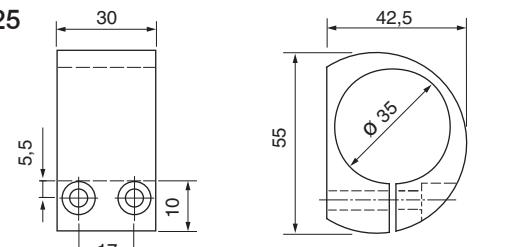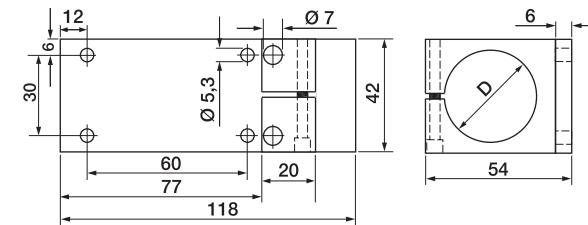TYPE	ID-NO.	DIMENSIONS	DESIGN																		
KLS 20 KLS 34	Z00100 Z00102	 <p>E: hexagon socket screw 1.4305</p>	Clamps of PA, for smooth-bodied switches <table border="1"> <tr> <td>F</td><td>Ø 20</td><td>Ø 34</td></tr> <tr> <td>A</td><td>47</td><td>61</td></tr> <tr> <td>B</td><td>30</td><td>47</td></tr> <tr> <td>C</td><td>17</td><td>15</td></tr> <tr> <td>D</td><td>32</td><td>45</td></tr> <tr> <td>E</td><td>M5x30</td><td>M5x50</td></tr> </table>	F	Ø 20	Ø 34	A	47	61	B	30	47	C	17	15	D	32	45	E	M5x30	M5x50
F	Ø 20	Ø 34																			
A	47	61																			
B	30	47																			
C	17	15																			
D	32	45																			
E	M5x30	M5x50																			
KLB 35	Ø 35	 <p>hexagon socket screw 1.4571</p>	Clamp of PTFE (Teflon), for smooth-bodied switches hexagon socket screw M5x40																		
KBM 025 KBM 030 KBM 035	Ø 25 Ø 30 Ø 35	 <p>hexagon socket screw 1.4571</p>	Mounting clamp of Aluminium <table border="1"> <tr> <th>Type</th><th>D</th></tr> <tr> <td>KBM 025</td><td>Ø 25</td></tr> <tr> <td>KBM 030</td><td>Ø 30</td></tr> <tr> <td>KBM 035</td><td>Ø 35</td></tr> </table>	Type	D	KBM 025	Ø 25	KBM 030	Ø 30	KBM 035	Ø 35										
Type	D																				
KBM 025	Ø 25																				
KBM 030	Ø 30																				
KBM 035	Ø 35																				



Headquarters
EGE-Elektronik
Spezial-Sensoren GmbH
Ravensberg 34
D-24214 Gettorf
Tel. +49 (0) 4346 / 41580
Fax +49 (0) 4346 / 5658
Internet: www.ege-elektronik.com



EGE-Elektronik ApS
Forstallé 79
DK-6200 Aabenraa
Tel. +45 70207271
Fax +45 70207272



EGE-Specialsensorer AB
Box 140
S-50113 Borås
Tel. +46 32512060
Fax +46 32512064



Stork AS
Brynsveien 100
N-1352 Kolsås
Tel. +47 67176400
Fax +47 67176401



Protacon Technologies Ltd.
Kirrintie 11 (PL 353)
40270 Palokka (40101 Jkl)
Finland
Tel. +358 (0)10 322 7100
Fax +358 (0)10 322 7119



EGE-Elektronik Spezial-Sensoren
16 B rue Jean Barraud
F-77100 Nanteuil les Meaux
Tel. +33 7 81 00 50 28
Fax +49 (0) 4346 5658



Cematic-Electric B.V.
Spinel 200
NL-3316 LG Dordrecht
Telefon +31 74 2433422
Telefax +31 74 2913333



ICM Ital Control Meters Srl
Via della Valle 67
I-20048 Carate Brianza (Mi)
Tel. +39 0362 8052 00
Fax +39 0362 8052 01



Bibus Spain, S. L.
Rua do Arroncal, Vial C – Nave 4A
ES-36350 Nigran
Tel. +34 986 247286
Fax +34 986 209247



Powelectrics Limited
Unit 12 Ninian Park
Ninian Way
Tamworth
GB-Staffordshire B77 5ES
Tel. +44 1827 310666
Fax +44 1827 310999



Bachofen AG
Ackerstraße 42
CH-8610 Uster
Tel. +41 449441111
Fax +41 449441233



VWR International GmbH
Graumangasse 7
A-1150 Wien
Tel. +43 1 97 002 - 0
Fax +43 1 97 002 - 600



Countapulse Controls (PTY) LTD.
P.O.B. 40393
ZA-2022 Cleveland
Tel. +27 116157556
Fax +27 116157513



HITECH Ltd.
1-34-12 Shimoura
Setagaya-ku
Tokyo JAPAN
Tel. +81 3-5430-2301
Fax +81 3-5430-2302



Colterlec Pty Ltd.
Unit 2 106-110 Beaconsfield Street
AUS-Silverwater NSW 2128
Tel. +61 1300 362626
Fax +61 1300 017100



PROTEK TEKNIK ELEKTRİK TİC. SAN. LTD. ŞTİ.
Okçumusa Cad. Kismet Han
No: 36/2 P.K.
TR-34420 Karaköy-Istanbul
Tel. +90 212 237 20 00
Fax +90 212 235 46 09



IAC & Associates
2105 Fasan Drive
Oldcastle
CDN-Ontario N0R 1L0
Tel. +1 519 7370311
Fax +1 519 7370314
TF +1 800 711 1900



Yuden-Tech Co., Ltd.
5F., No. 121, Lide St.,
Zhonghe City, Taipei County 235,
Taiwan (R.O.C.)
Tel. +886 2 8221 2958
Fax +886 2 8221 2492



ChengTian Auto Instrumentation (Shanghai) Co., Ltd.
2F, BLDG 7, No. 4289,
Jindu Rd., Minhang Area
Shanghai City, China
Tel. +86 21 54887307
Fax +86 21 54887305



Wolf Process Automation Ltd.
Unit A2.1,
Thompson Enterprise Centre
Clane Business Park,
Clane, Co. Kildare,
W91 E761, Ireland
Tel. +353 45 831575



KOLEKTOR SISTEH d.o.o.
Šländrova ulica 10
SI-1231 Ljubljana - Črnuče
Slovenija
Tel. +386 1 5636 300
Fax +386 1 7227 930



Introl Sp. z o.o.
ul. Kościuszki 112
40-519 Katowice
Tel. +48 32 789 00 00
Fax +48 32 205 33 77



Bibus Portugal, LDA
Centro Empresarial AAA
Rua Ponte da Pedra, 240 - C4
4470-108 Gueifães - Maia
Porto
Tel. +351 22 906 50 50
Fax +351 22 906 50 53



Futron Electronics PTE Ltd.
1004 Toa Payoh North
#04-08/09/10
Singapore 318995
Tel. +65 6250 2456
Fax +65 6250 6592



Useong Electrade Co.,
D-1006, Technopark
No. 1345, Soha-dong, Gwangmyeong-si
Gyeonggi-do,
Korea
Tel. +82 (0) 2 2686 7314
Fax +82 (0) 2 2686 7316